



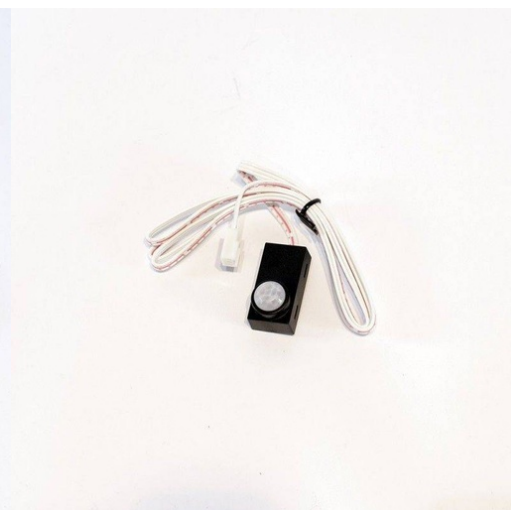

## PIR motion sensor 12-36V-DC 8A 60° IP20

### Ref. SR-8004DC

Sensor pokreta i detektor prisutnosti PIR za LED trake, sijalice i niskonaponske rasvjetne uređaje (12-36V).  
Maksimalno opterećenje 288W (na 36V) i 8A. 96-288W - 8A 12-36VDC 95x37x20mm  $\angle$  60°  $\Rightarrow$  0-3m PIR IP20

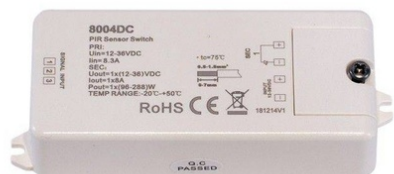

### Product data

|                               |              |
|-------------------------------|--------------|
| Ugao detekcije (°)            | 60           |
| Certifikati                   | CE, ROHS     |
| Razred energetske efikasnosti | A+ (2021)    |
| Povezivost                    | PIR          |
| Dimenzije (mm) LxIxh          | 95x37x20     |
| Učestalost korištenja         | Intenzivan   |
| Garancija                     | 5 godina     |
| maksimalna jačina (A)         | 8A           |
| IP                            | IP20         |
| Materijal                     | Plastika     |
| Broj kanala                   | 1            |
| Snaga (W)                     | 92-288 maks. |
| Raspon detekcije (m)          | 3            |
| Raspon temperature            | -20 ~ +50°C  |
| Senor                         | Da           |
| Izlazni napon (V)             | 12/36V-DC    |

|                     |                                  |
|---------------------|----------------------------------|
| Nominalni Napon (V) | 12/36V-DC                        |
| Spoljna upotreba    | Da, unutar vodonepropusne kutije |
| Životni vijek (h)   | 35000                            |

## Product variants

*Reference*

*Attributes*



SR-8004DC