

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

SRP-1009-50CC je nastavitelný LED ovladač o výkonu 50W s konstantním proudem jednopásmového výstupu a nastavitelným proudem od 250ma do 1500ma prostřednictvím DIP přepínačů pro různé konstantní proudy. Je navržen s napájením 200 - 240V. Účinnost ovladače může být vyšší než 0,9 a účinnost přesahuje 87%. Umožňuje hladké a hluboké ztlumení 0,1 % bez blikání nebo broušení. LED ovladač je navržen s RF kontrolním rozhraním a může být kompatibilní s různými RF dálkovými ovladači. Tento ovladač je značky Sunricher v kategorii Perfect RF.

Output	Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Output	Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Input	Rated Power	50W							
	Voltage Range	200-240V AC							
	Frequency	50/60Hz							
	Power Factor (Typ.)	>0.9							
	Efficiency (Typ.)	87% @ 230VAC							
	Input Current (Typ.)	0.27A @ 230VAC							
	Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
Protection	Short Circuit	Yes, auto recovery after fault removed							
	Over Voltage	Yes, auto recovery after fault removed							
	Over Temperature	Yes, auto recovery after fault removed							
	Working Temp.	-20°C ~ +45°C							
Environment	Max. Case Temp.	85°C							
	Working Humidity	10% ~ 95% RH non-condensing							
	Storage Temp. & Humidity	-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Certifikáty	CE, ROHS
Záruka	5 let

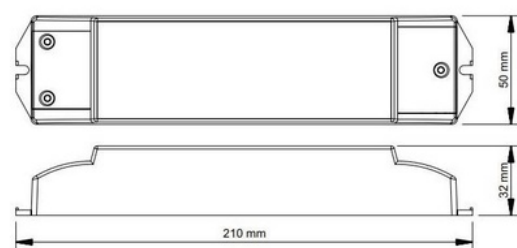

Product variants

Reference

Attributes



SRP-1009-50CC