

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

Käesolev SRP-1009-50CC on 50W dimmibe LED-juht, millel on pidev voolupinge 1 kanali kaudu ja reguleeritav vool 250mA kuni 1500mA DIP-lülite abil erinevate pidevate voolude jaoks. See on projekteeritud 200 - 240V sisendiga. Juhtme võimsuse tegur võib olla suurem kui 0.9 ja efektiivsus ületab 87%. See võimaldab sujuvat ja sügavat dimmingut 0.1% ilma vilkumise või suminata. LED-juht on projekteeritud RF juhtimissekkumisega ja võib olla ühilduv mitmesuguste RF-puldiga. See juht on Sunricheri kaubamärgist Perfect RF kategoorias.

Output	Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Output	Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Input	Rated Power	50W							
	Voltage Range	200-240V AC							
	Frequency	50/60Hz							
	Power Factor (Typ.)	>0.9							
	Efficiency (Typ.)	87% @ 230VAC							
	Input Current (Typ.)	0.27A @ 230VAC							
	Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
Protection	Short Circuit	Yes, auto recovery after fault removed							
	Over Voltage	Yes, auto recovery after fault removed							
	Over Temperature	Yes, auto recovery after fault removed							
Environment	Working Temp.	-20°C ~ +45°C							
	Max. Case Temp.	85°C							
	Working Humidity	10% ~ 95% RH non-condensing							
Storage Temp. & Humidity		-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Certifikaadid	CE, ROHS
Garantii	5 aastat

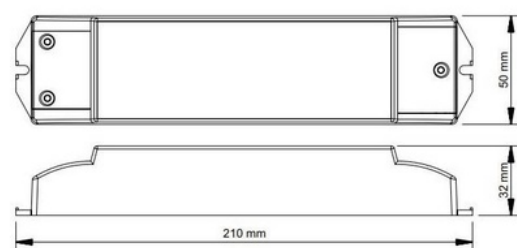

Product variants

Reference

Attributes



SRP-1009-50CC