

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

SRP-1009-50CC on 50W himmennettävä LED-ohjain, jossa on vakiojänniteulostulo yhdelle kanavalle ja säädettävä virta 250mA:sta 1500mA:iin DIP-kytkimien avulla eri vakiovirtoja varten. Se on suunniteltu syöttöjännitteelle 200 - 240V. Ohjaimen teho-osa voi olla suurempi kuin 0.9, ja tehokkuus ylittää 87%. Se mahdollistaa sujuvan ja syvän himmennyksen 0.1% ilman vilkkumista tai huminaa. LED-ohjain on varustettu RF-ohjausliitännällä ja se on yhteensopiva erilaisten RF-kaukosäätimien kanssa. Tämä ohjain on Sunricher-brändiltä Perfect RF -kategoriassa.

Output	Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Output	Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Input	Rated Power	50W							
	Voltage Range	200-240V AC							
	Frequency	50/60Hz							
	Power Factor (Typ.)	>0.9							
	Efficiency (Typ.)	87% @ 230VAC							
	Input Current (Typ.)	0.27A @ 230VAC							
	Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
Protection	Short Circuit	Yes, auto recovery after fault removed							
	Over Voltage	Yes, auto recovery after fault removed							
	Over Temperature	Yes, auto recovery after fault removed							
	Working Temp.	-20°C ~ +45°C							
Environment	Max. Case Temp.	85°C							
	Working Humidity	10% ~ 95% RH non-condensing							
	Storage Temp. & Humidity	-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Todistukset	CE, ROHS
Takuu	5 vuotta

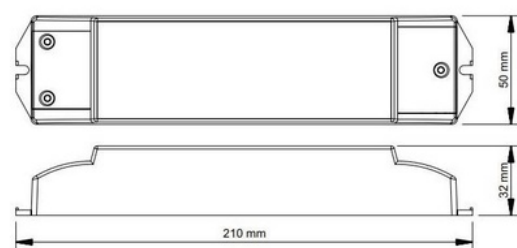

Product variants

Reference

Attributes



SRP-1009-50CC