
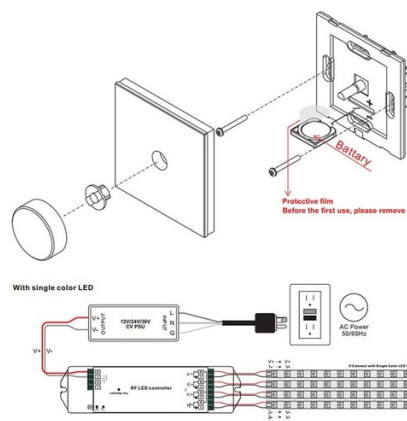


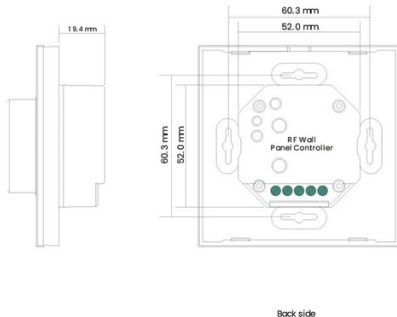


Single-color dimmable RF rotary switch for LED lighting - SUNRICHER - Easy RF

Ref. D2805R

Rotacijski regulator LED D2805R iz serije SUNRICHER EASY RF je rotacijski regulator koji nudi funkcije prebacivanja i glatkog podešavanja svjetline za jednostruku LED rasvjetu. Dizajniran s elegantnim i kompaktnim izgledom, od visokotemperaturnog stakla i okretne kontrole, LED regulator svjetlosti nudi glatke i precizne funkcije podešavanja i prebacivanja bez treptanja. Prilično je lako uključiti/isključiti ga pritiskom na okretni gumb i prigušiti svjetlinu okretanjem tog gumba. Kompatibilan s RF prijemnicima, koji su dostupni u verzijama s konstantnim naponom i konstantnom strujom, rotacijski LED regulator sposoban je upravljati različitim vrstama LED rasvjete. * Za njegovu instalaciju potreban je kvalificirani profesionalac i/ili savjetovanje naših tehničara.

Pair with RF receiver(Method 1)



Step 1:
Do wiring the RF receiver according to wiring diagram (please refer to the instruction of RF receiver that you would like to pair with).


Step 2:
Click the "Learning Key" button on RF receiver to set it into pairing status.

Step 3:
Rotate or click the knob, LED lights connected with the RF receiver flicker once means the receiver is paired with the remote successfully.

Note: One receiver can be paired with max 8 remote controls.

Product data

Certifikati	CE, ROHS
Razred energetske učinkovitosti	A+ (2021)
Povezanost	Radiofrekvencija
Kontrola boje	Monokromatski
Dimenzije (mm) LxIxh	86x86x13
Frekvencija korištenja	Intenzivno
Jamstvo	5 godina
IP	IP20
Materijal	Plastika
Montiranje	Ugradbeni
Broj zona	1
Raspon detekcije (m)	25000
Raspon temperature	0 ~ +40°C
Sensor translates to Croatian as Sensor.	Da
Nomin tension (V)	3V-DC
Vanjska upotreba	Ne
Radni vijek (h)	35000

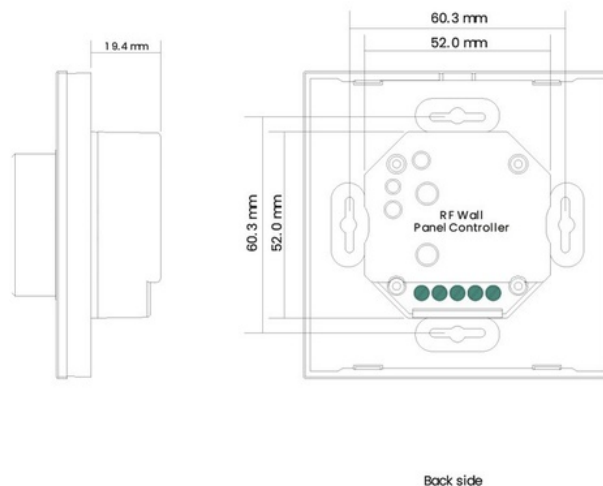

Product variants

Reference

Attributes

D2805R

