
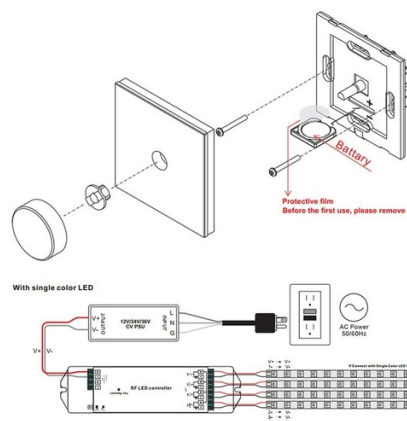


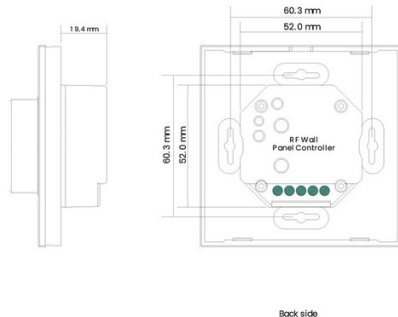


Single-color dimmable RF rotary switch for LED lighting - SUNRICHER - Easy RF

Ref. D2805R

De LED Rotary Dimmer D2805R vun der SUNRICHER EASY RF Serie ass e Rotary Dimmer, deen souwuel Schaltfunktioneen als och eng glat Hellechtregulierung fir eenzeg-faarwegt LED-Licht ubitt. Entworf mat engem elegante a kleng Erscheinung, héich-stärkt temperéiert Glasmaterial, an enger Rotary Knob, bitt de LED Dimmer eng glat an genue Dimmen a Schaltfunktioneen ouni Flicker. Et ass quite einfach, et un/aus ze schalten andeems Dir de Rotary Knob klickt an de Hellecht ze dimmen andeems Dir den Rotary Knob dréit. Kompatibel mat RF Empfänger, verfügbar an konstant Spannung a konstant Strooss Versiounen, ass de LED Rotary Dimmer fäeg fir verschidde Typen vu LED-Licht ze kontrolléieren. * Fir d'Installatioun ass eng qualifizéiert Fachperson a/oder eng Berodung mat eisen Techniker noutwendeg.

Pair with RF receiver(Method 1)



Step 1:
Do wiring the RF receiver according to wiring diagram (please refer to the instruction of RF receiver that you would like to pair with).


Step 2:
Click the "Learning Key" button on RF receiver to set it into pairing status.

Step 3:
Rotate or click the knob, LED lights connected with the RF receiver flicker once means the receiver is paired with the remote successfully.

Note: One receiver can be paired with max 8 remote controls.

Product data

Certificaten	CE, ROHS
Klasse énérgéiert Effizient	A+ (2021)
Verbindung	Radiofirfrequency
Faarfkontroll	Monocolor
Dimensiounen (mm) LxLxh	86x86x13
Benotzungsfrequenz	Intensiv
Garantie	5 Joer
IP	IP20
Material	Plastik
Montage	Versenkbar
Zuel vun Zonen	1
Detektéierberäich (m)	25.000
Temperaturbereich	0 ~ +40°C
Sensor	Jo
Nummspannung (V)	3V-DC
Uwendung am Freien	Nei
Letztentzäit (h)	35000

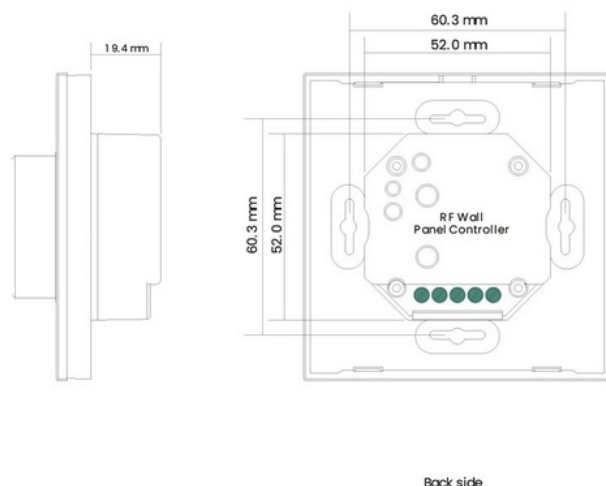

Product variants

Reference

Attributes

D2805R

