


Mechanical Structures and Installations

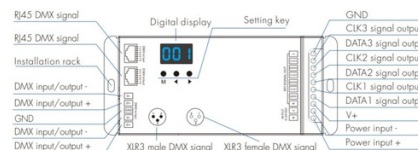


DMX512 to SPI Pixel Decoder - 5-24V DC - RF Controller

Ref. SK-DSA

LED DMX512 do SPI dekodier konvertuje DMX signale u SPI signale za kontrolu pametnih ili digitalnih RGB ili RGBW LED traka. Funkcionira i kao RF kontroler, omogućavajući upravljanje sa 2.4GHz RF daljinskim upravljačem za praktičnu i bežičnu kontrolu. Posjeduje digitalni ekran i kompatibilan je s brojnim vrstama LED IC čipova. Omogućuje kreiranje velike raznolike spektakularne i prilagođene efekte osvjetljenja za vaše projekte.


Wiring Diagram

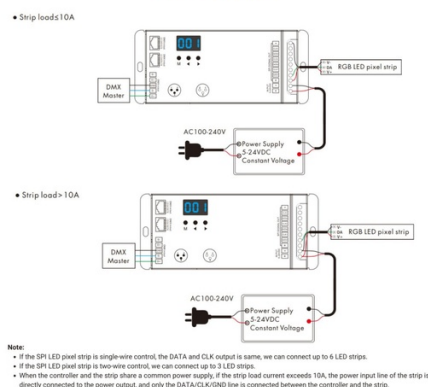

Product data

Certifikati	CE, ROHS
Povezivost	RF, DMX
Kontrola boje	RGB, RGBW
Dimenzije (mm) LxIhx	165 x 70 x 37
Garancija	5 godina
IP	IP20
Raspon temperature	-30°C ~ +55°C
Nominelni Napon (V)	5-24V
Spoljna upotreba	Ne

Mechanical Structures and Installations

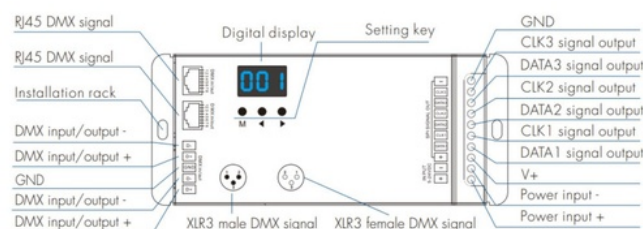

Product variants

Reference

Attributes



SK-DSA