


Function introduction

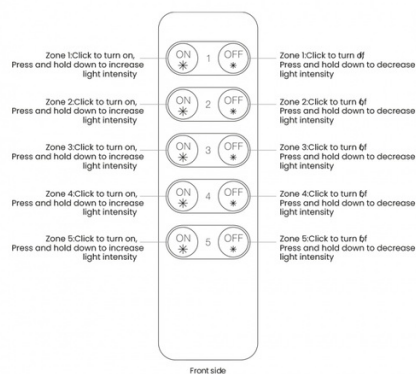

Single-color RF dimmer control for LED lighting up to 5 zones SUNRICHER - Perfect RF

Ref. SR-2833K5

RF Fernsteuerung für d'Kraaft an d'Hellegkeet van 5 Lichtzonen. Für eenfaarweg LEDs. Den Controller funktionéiert méi wéi 20 Meter wäit. 5 Zonen. Schalter A/Aus ouni Flackeren. Dimmbar van 0.1-100% "Smoother".

Pair with RF receiver



Step 1: Do wiring the RF receiver according to wiring diagram (please refer to the instruction of RF receiver that you would like to pair with).



Step 2: Click the teaming key" button on RF receiver or re-power on the receiver three times continuously to set it into pairing status


Step 3: Choose one zone and click ON/OFF of the zone (zone 1), e.g. LED lights connected with the RF receiver flicker once means the receiver is paired with zone 1 successfully

After pairing click or hold ON/OFF of 1/2/3/4/5 to control each zone separately

Note: one receiver can be paired with max 8 remote controls.

Product data

Certificaten	CE, ROHS
Klasse énérgéiert Effizient	A+ (2021)
Verbindung	Radiofirfrequency
Dimensiounen (mm) LxIxh	136.5x40x11.5mm
Benotzungsfrequenz	Intensiv
Garantie	5 Joer
IP	IP20
Material	Plastik
Zuel vun Zonen	1
Detektéierberäich (m)	25.000
Temperaturbereich	0 ~ +40°C
Sensor	Neen
Kontrollsystem	CCT
Nummspannung (V)	6V-Gleichwärt
Uwendung am Freien	Nei
Letztentzäit (h)	35000

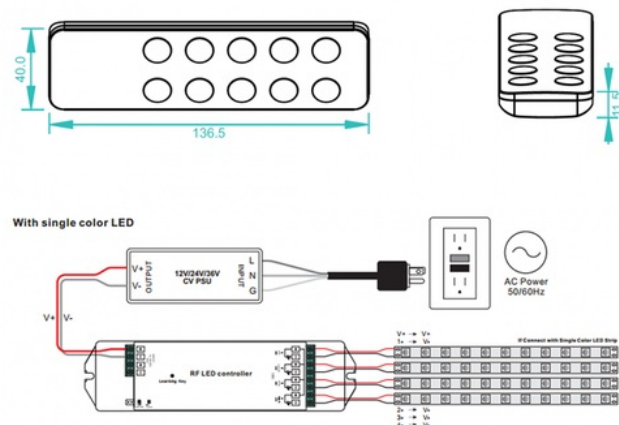

Product variants

Reference

Attributes

SR-2833K5

