

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

SRP-1009-50CC ir 50W dimmējams LED vadītājs ar konstanta strāvas izeju 1 kanālam un regulējamu strāvu no 250mA līdz 1500mA, izmantojot DIP slēdžus dažādām konstanta strāvas iestatījumiem. Tas ir izstrādāts ar ieejas spriegumu 200 - 240V. Vadītāja jaudas koeficients var būt lielāks par 0.9, un efektivitāte pārsniedz 87%. Tas ļauj veikt vienmērīgu un dziļu dimmēšanu līdz 0.1% bez mirgošanas vai trokšņa. LED vadītājs ir izstrādāts ar RF kontroles interfeisu un var būt saderīgs ar dažādām RF tālvadības pultīm. Šis vadītājs ir no Sunricher zīmola Perfect RF kategorijā.

Output	Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Input	Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Protection	Rated Power	50W							
	Voltage Range	200-240V AC							
	Frequency	50/60Hz							
	Power Factor (Typ.)	>0.9							
	Efficiency (Typ.)	87% @ 230VAC							
	Input Current (Typ.)	0.27A @ 230VAC							
Environment	Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
	Short Circuit	Yes, auto recovery after fault removed							
	Over Voltage	Yes, auto recovery after fault removed							
Environment	Over Temperature	Yes, auto recovery after fault removed							
	Working Temp.	-20°C ~ +45°C							
	Max. Case Temp.	85°C							
	Working Humidity	10% ~ 95% RH non-condensing							
Environment	Storage Temp. & Humidity	-40°C ~ +85°C, 10% ~ 95% RH							

Product data

sertifikāti	CE, ROHS
Garantija	5 gadi

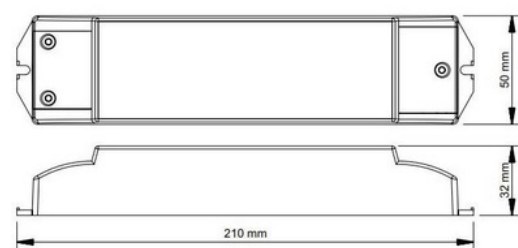

Product variants

Reference

Attributes



SRP-1009-50CC