




Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard	EN 62368-1:2020+A11:2020
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE,EMC,RED




RGB+CCT Controller 12-48V DC - 25A (5A/channel) - RF 2.4G - PUSH dimmer - Skydance

Ref. SK-V5


RGB + CCT kontroler sa 3 kanala za LED svjetiljke od 12-48V. Posjeduje 10 unaprijed postavljenih dinamičkih načina. Nudi blago prigušivanje od 0 do 100% bez treptanja i je kompatibilan sa RF 2.4G Skydance daljinskim upravljačima. Može se regulirati pomoću PUSH-a. Posjeduje funkciju "auto-prijenosa" i "auto-sinkronizacije", omogućujući slanje signala drugim kontrolerima i sinkronizaciju kada su kontrolirani istim daljinskim upravljačem.

Mechanical Structures and Installations



Product data

Certifikati	CE, ROHS
Povezivost	RF
Kontrola boje	RGB+CCT
Dimenzije (mm) LxIxh	175 X 45 X 27
Udaljenost kontrole	30m
Garancija	5 godina
maksimalna jačina (A)	5A/CH: 12-24V 4A/CH:36-48V
IP	IP20
Broj kanala	5
Snaga (W)	5 x 60 :12V 5 x 120:24V 5 x144:36V 5 x 192:48V
Nominelni Napon (V)	12-48VDC
Spoljna upotreba	Ne

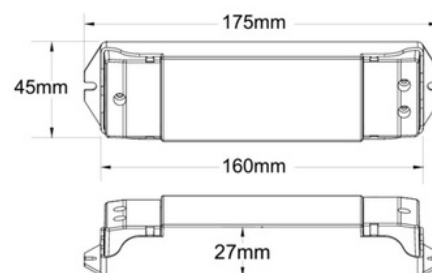

Product variants

Reference

Attributes



SK-V5