

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

Den SRP-1009-50CC er en 50W dimbar LED-driver med en konstant strømutgang på 1 kanal og justerbar strøm fra 250mA til 1500mA via DIP-brytere for de forskellige konstante strømmene. Den er designet med en inngang på 200 - 240V. Effektfaktoren til driveren kan være større enn 0,9, og effektiviteten overskrider 87%. Den tillater jevn og dyp dimming på 0,1% uten flimring eller brumming. LED-driveren er designet med et RF kontrollgrensesnitt og kan være kompatibel med en rekke RF fjernkontroller. Denne driveren er fra Sunricher-merket i kategorien Perfekt RF.

Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Rated Power	50W							
Voltage Range	200-240V AC							
Frequency	50/60Hz							
Power Factor (Typ.)	>0.9							
Efficiency (Typ.)	87% @ 230VAC							
Input Current (Typ.)	0.27A @ 230VAC							
Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
Short Circuit	Yes, auto recovery after fault removed							
Over Voltage	Yes, auto recovery after fault removed							
Over Temperature	Yes, auto recovery after fault removed							
Working Temp.	-20°C ~ +45°C							
Max. Case Temp.	85°C							
Working Humidity	10% ~ 95% RH non-condensing							
Storage Temp. & Humidity	-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Sertifikater	CE, ROHS
Garanti	5 år

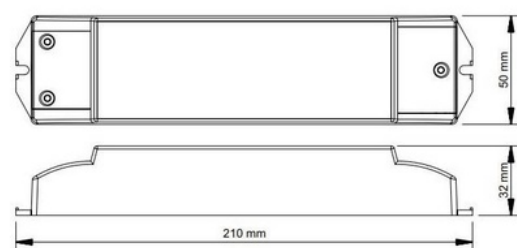

Product variants

Reference

Attributes



SRP-1009-50CC