




## LED projektor za vanjsku upotrebu 50W CCT - Serija "PRO" - 110lm/W - IP66


### Ref. B1850-50W-N

LED projektor 50W serije "Pro", visoke efikasnosti (110lm/W). Metalno kućište sa odličnom disipacijom topline i staklenim difuzorom. Orijentabilan, i prikladan za vanjsku upotrebu (IP66). Podešivi CCT sistem: topla bijela (3000K), neutralna bijela (4000K) i hladna bijela (5000K).

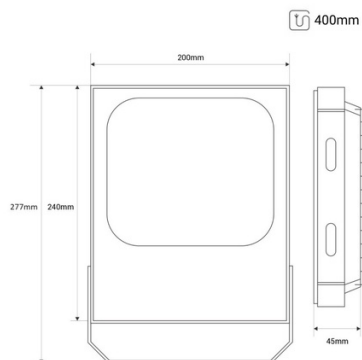

### Product data


|                               |                                                |
|-------------------------------|------------------------------------------------|
| Ugao otvaranja (°)            | 120                                            |
| Certifikati                   | CE, ROHS                                       |
| Razred energetske efikasnosti | E                                              |
| Dimenzije (mm) LxIxh          | 277 x 200 x 45                                 |
| Prigušivo                     | Ne                                             |
| Efikasnost (Lm/w)             | 110                                            |
| Frekvencija (Hz)              | 50 - 60                                        |
| Gam vrste projektora          | Seriya "Pro"                                   |
| Garancija                     | 5 godina                                       |
| IP                            | IP66                                           |
| Kelvin (K)                    | 3000, 4000, 5000                               |
| Lumeni (Lm)                   | WW (4462lm) - NW (5153lm) - CW (4558lm)        |
| Materijal                     | Metal                                          |
| Materijalni difuzor           | Kristal                                        |
| Orijentabilan                 | Da                                             |
| Snaga (W)                     | 50                                             |
| Senor                         | Ne                                             |
| Nominelni Napon (V)           | 200 - 265V                                     |
| Tonalitet                     | CCT                                            |
| Spoljna upotreba              | Da                                             |
| Preporučena upotreba          | Vrt, Industrija, Parkiranje, Industrijske hale |
| Životni vijek (h)             | 50000                                          |

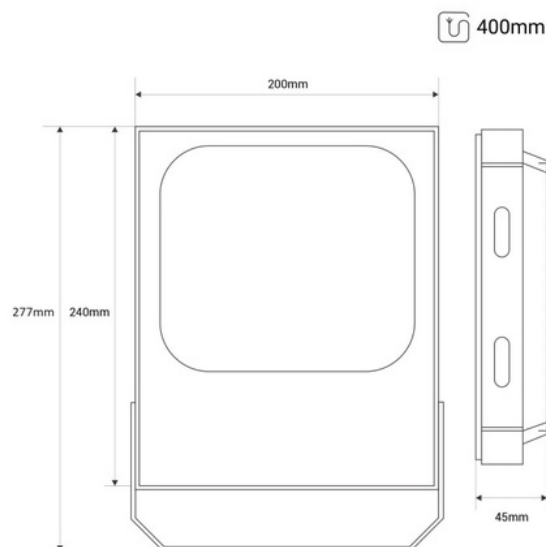

Product variants

Reference

Attributes



B1850-50W-N