

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

Driverul SRP-1009-50CC este un driver LED dimabil de 50W cu o ieșire de curent constant de 1 canal și curent ajustabil de la 250mA la 1500mA prin intermediul comutatoarelor DIP pentru diferitele curenți constante. Este proiectat cu o tensiune de intrare de 200 - 240V. Factorul de putere al driver-ului poate fi mai mare de 0.9, iar eficiența depășește 87%. Permite o reducere a luminii lină și profundă de 0.1% fără flicker sau zumzet. Driverul LED este proiectat cu o interfață de control RF și poate fi compatibil cu o varietate de telecomenzi RF. Acest driver face parte din marca Sunricher în categoria Perfect RF.

Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Rated Power	50W							
Voltage Range	200-240V AC							
Frequency	50/60Hz							
Power Factor (Typ.)	>0.9							
Efficiency (Typ.)	87% @ 230VAC							
Input Current (Typ.)	0.27A @ 230VAC							
Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
Short Circuit	Yes, auto recovery after fault removed							
Over Voltage	Yes, auto recovery after fault removed							
Over Temperature	Yes, auto recovery after fault removed							
Working Temp.	-20°C ~ +45°C							
Max. Case Temp.	85°C							
Working Humidity	10% ~ 95% RH non-condensing							
Storage Temp. & Humidity	-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Certificatul	CE, ROHS
Garantie	5 ani

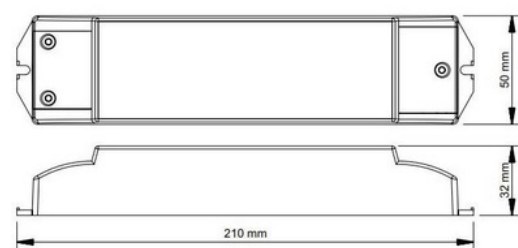

Product variants

Reference

Attributes



SRP-1009-50CC