



Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard	EN 61348-1:2015+A1:2021 EN 61348-2-13:2014+A1:2017
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE, EMC, RED



CCT Controller - 12-24V DC - 2 channels - 5A/channel - RF 2.4GHz - Skydance


Ref. SK-V2

CCT kontroler sa 2 kanala za LED rasvjetu od 12-24V. Nudi glatku prigušivanje od 0 do 100% bez treptanja i je kompatibilan sa CCT RF 2.4GHz Skydance daljinskim upravljačima. Sa funkcijama auto-prijenosa i auto-sinkronizacije koje omogućavaju efikasnu i sinkronizovanu kontrolu.



Product data

Visok	18mm
Širina	33mm
Povezivost	RF
Kontrola boje	Monokromatski
Udaljenost kontrole	30m
Garancija	5 godina
maksimalna jačina (A)	5A/kana
IP	IP20
Dug	97mm
Broj kanala	2
Snaga (W)	2 x (60-120W)
Raspon temperature	-30°C ~ +55°C
Izlazni napon (V)	12-24VDC
Nominelni Napon (V)	12-24V DC
Spoljna upotreba	Ne

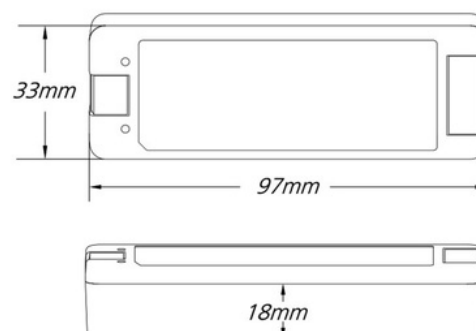

Product variants

Reference

Attributes

SK-V2

