

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

SRP-1009-50CC je 50W stmievaný LED ovládač s konštantným prúdom na 1 kanál a nastaviteľným prúdom od 250mA do 1500mA pomocou DIP prepínačov pre rôzne konštantné prúdy. Je navrhnutý na vstup 200 - 240V. Sila faktora ovládača môže byť väčšia ako 0,9 a účinnosť presahuje 87%. Umožňuje plynulé a hlboké stmievanie 0,1% bez blikania alebo hummingu. LED ovládač je navrhnutý s rozhraním pre RF ovládanie a môže byť kompatibilný s rôznymi RF diaľkovými ovládačmi. Tento ovládač je od značky Sunricher v kategórii Perfect RF.

Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Rated Power	50W							
Voltage Range	200-240V AC							
Frequency	50/60Hz							
Power Factor (Typ.)	>0.9							
Efficiency (Typ.)	87% @ 230VAC							
Input Current (Typ.)	0.27A @ 230VAC							
Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
Short Circuit	Yes, auto recovery after fault removed							
Over Voltage	Yes, auto recovery after fault removed							
Over Temperature	Yes, auto recovery after fault removed							
Working Temp.	-20°C ~ +45°C							
Max. Case Temp.	85°C							
Working Humidity	10% ~ 95% RH non-condensing							
Storage Temp. & Humidity	-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Certifikáty	CE, ROHS
Záruka	5 rokov

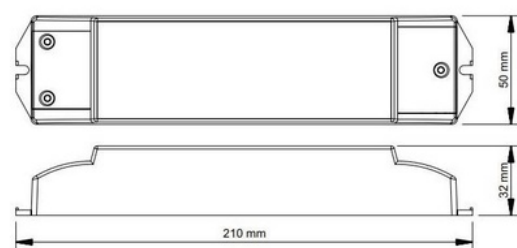

Product variants

Reference

Attributes



SRP-1009-50CC