

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

SRP-1009-50CC je 50W zatemnilni LED driver s konstantnim tokom na 1 kanal in nastavljivim tokom od 250mA do 1500mA preko DIP stikal za različne konstantne tokove. Zasnovan je z vhodom 200 - 240V. Močnostni faktor driverja lahko presega 0.9, učinkovitost pa presega 87%. Omogoča gladko in globoko zatemnitev 0.1% brez utripanja ali brnenja. LED driver je zasnovan z RF kontrolnim vmesnikom in je združljiv z različnimi RF daljinskimi upravljalniki. Ta driver je iz blagovne znamke Sunricher v Perfect RF kategoriji.

Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Rated Power	50W							
Voltage Range	200-240V AC							
Frequency	50/60Hz							
Power Factor (Typ.)	>0.9							
Efficiency (Typ.)	87% @ 230VAC							
Input Current (Typ.)	0.27A @ 230VAC							
Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
Short Circuit	Yes, auto recovery after fault removed							
Over Voltage	Yes, auto recovery after fault removed							
Over Temperature	Yes, auto recovery after fault removed							
Working Temp.	-20°C ~ +45°C							
Max. Case Temp.	85°C							
Working Humidity	10% ~ 95% RH non-condensing							
Storage Temp. & Humidity	-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Potrdila	CE, ROHS
Garancija	5 let

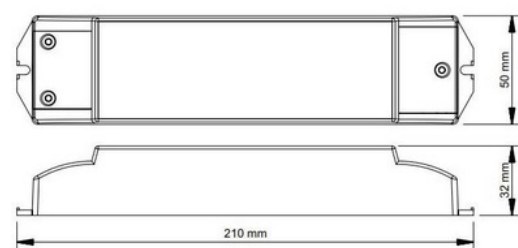

Product variants

Reference

Attributes



SRP-1009-50CC