


#### Function introduction

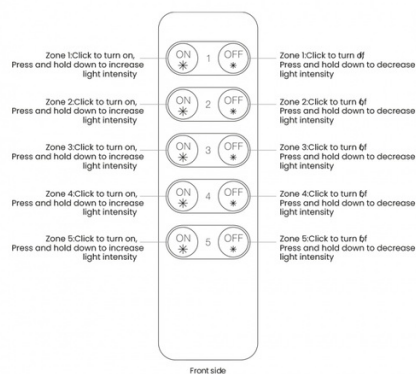

## Single-color RF dimmer control for LED lighting up to 5 zones SUNRICHER - Perfect RF

### Ref. SR-2833K5

RF daljinski upravljalnik za nadzor moči in svetlosti 5 svetlobnih območij. Za eno-barvne LED diode. Nadzorni sistem deluje na razdalji več kot 20 metrov. 5 con. Vklopi/izklopi brez utripanja. Prilagodljivo od 0,1-100% "Gladko".

#### Pair with RF receiver



Step 1: Do wiring the RF receiver according to wiring diagram (please refer to the instruction of RF receiver that you would like to pair with).



Step 2: Click the "Learning Key" button on RF receiver or re-power on the receiver three times continuously to set it into pairing status.


Step 3: Choose one zone and click "ON" or "OFF" of the zone (zone 1), e.g. LED lights connected with the RF receiver flicker once means the receiver is paired with zone 1 successfully.

After pairing, click and hold "ON" or "OFF" of 1/2/3/4/5 to control each zone separately.

Note: one receiver can be paired with max 8 remote controls.

### Product data

|                                 |                      |
|---------------------------------|----------------------|
| Potrdila                        | CE, ROHS             |
| Razred energetske učinkovitosti | A+ (2021)            |
| Konektivnost                    | Radijska frekvenca   |
| Dimenzije (mm) LxIxh            | 136,5 x 40 x 11,5 mm |
| Frekvenca uporabe               | Intenzivno           |
| Garancija                       | 5 let                |
| IP                              | IP20                 |
| Material                        | Plastika             |
| Število območij                 | 1                    |
| Obseg zaznavanja (m)            | 25000                |
| Temperaturni razpon             | 0 ~ +40°C            |
| Senor                           | Ne                   |
| Sistem nadzora                  | CCT                  |
| Nomin Spannung (V)              | 6V-DC                |
| Zunanja raba                    | Ne                   |
| Življenjska doba (h)            | 35000                |

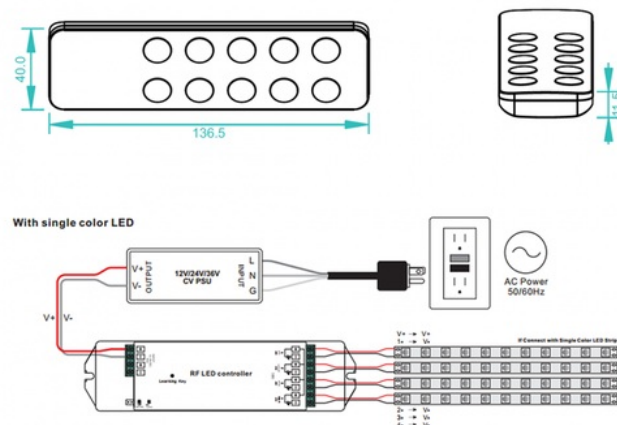

Product variants

Reference

Attributes

SR-2833K5

