

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

Den SRP-1009-50CC är en 50W dimbar LED-drivare med en konstant strömutgång på 1 kanal och justerbar ström från 250mA till 1500mA via DIP-brytare för olika konstantström. Den är designad med en ingång på 200 - 240V. Effektfaktorn för drivaren kan vara större än 0,9, och verkningsgraden överstiger 87%. Den möjliggör smidig och djup dimning på 0,1% utan flimmer eller brummande. LED-drivaren är utrustad med ett RF-kontrollgränssnitt och kan vara kompatibel med en mängd olika RF-fjärrkontroller. Denna drivare kommer från Sunricher-märket i kategorin Perfect RF.

	Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
Output	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
	Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
Input	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
	Rated Power	50W							
Input	Voltage Range	200-240V AC							
	Frequency	50/60Hz							
	Power Factor (Typ.)	>0.9							
	Efficiency (Typ.)	87% @ 230VAC							
	Input Current (Typ.)	0.27A @ 230VAC							
	Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
Protection	Short Circuit	Yes, auto recovery after fault removed							
	Over Voltage	Yes, auto recovery after fault removed							
	Over Temperature	Yes, auto recovery after fault removed							
	Working Temp.	-20°C ~ +45°C							
Environment	Max. Case Temp.	85°C							
	Working Humidity	10% ~ 95% RH non-condensing							
	Storage Temp. & Humidity	-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Certifikat	CE, ROHS
Garanti	5 år

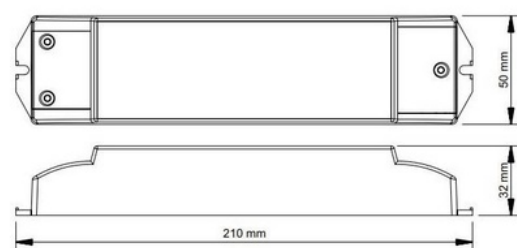

Product variants

Reference

Attributes



SRP-1009-50CC