

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

Den SRP-1009-50CC er en dæmpbar LED-controller på 50W med konstant strømudgang på 1 kanal og justerbar strøm fra 250mA til 1500mA via DIP-switches til de forskellige strømme til konstant strøm. Den er designet med en indgang på 200 - 240V. Power factor for controlleren kan være over 0,9, og effektiviteten er over 87%. Den muliggør blød og dyb dæmpning på 0.1% uden flimmer eller brummen. LED-controlleren er designet med RF-kontrolinterface og kan være kompatibel med en række RF-fjernbetjening. Denne controller er fra mærket Sunricher i kategorien Perfect RF.

Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Rated Power	50W							
Voltage Range	200-240V AC							
Frequency	50/60Hz							
Power Factor (Typ.)	>0.9							
Efficiency (Typ.)	87% @ 230VAC							
Input Current (Typ.)	0.27A @ 230VAC							
Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
Short Circuit	Yes, auto recovery after fault removed							
Over Voltage	Yes, auto recovery after fault removed							
Over Temperature	Yes, auto recovery after fault removed							
Working Temp.	-20°C ~ +45°C							
Max. Case Temp.	85°C							
Working Humidity	10% ~ 95% RH non-condensing							
Storage Temp. & Humidity	-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Certifikater	CE, ROHS
Garanti	5 år

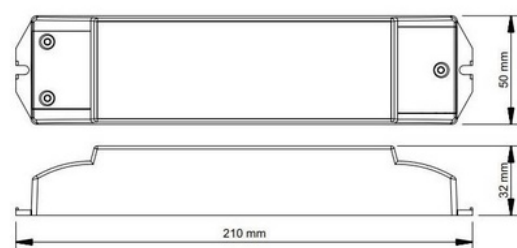

Product variants

Reference

Attributes



SRP-1009-50CC