




10W
IP55
GX53
LED
CCT
SYSTEM
3000K-4000K-6000K



Mini-bollard til stier LED FUMAGALLI "ESTER 500" - GX53 - 10W - CCT

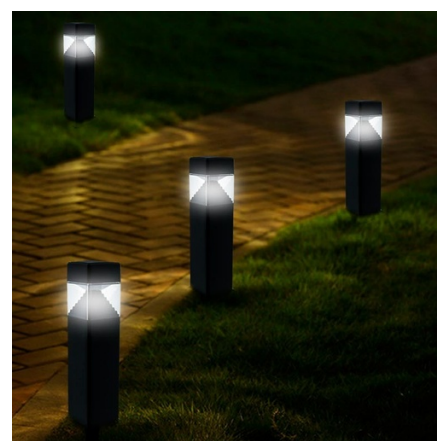

Product data

Kabelfarve	Hvid (bruge), Sort (bruge), Grå (bruge)
T° af lys	CCT (bruge)
Patronhylster	GX53
Certifikater	CE, ROHS
Klasse energieffektivens	A+ (2021)
Mål (mm) LxLxh	175x175x480
Dimbar	Nej
Frekvens (Hz)	50 - 60
Brugsfrekvens	Intensiv
Garanti	3 år
IP	IP55
Kelvin (K)	4000, 6500, 2700
Materiale	Harpe
Montering	Overflade
Temperaturområde	-20°C ~ +40°C
Nominel spænding (V)	100-240
Tonalitet	CCT
Udendørs brug	Ja
Anbefalet brug	Have
Levetid (h)	25000



Product variants

Reference	Attributes	
DS1.563.000.AXD1K	Kabelfarve: Sort (brug), T° af lys : CCT (brug)	 10W IP55 GX53   
DS1.563.000.LXD1K	Kabelfarve: Grå (brug), T° af lys : CCT (brug)	 10W IP55 GX53   
DS1.563.000.WXD1K	Kabelfarve: Hvid (brug), T° af lys : CCT (brug)	 10W IP55 GX53   