





Wiring Diagram

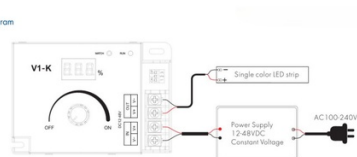



Mechanical Structures and Installations

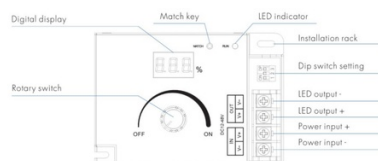

PMW Manual dimmer 12-48V DC - 20A - RF 2.4GHz - Adjustable frequency and dimming curve - Skydance



Ref. SK-V1-K

Manuel drejeregulator "Skydance" til monokrom LED-belysning på 12-48V DC, med 1-kanals udgang. Muliggør variation af PWM-frekvens mellem: 500Hz, 2kHz, 8kHz eller 16kHz og valg af linær eller logaritmisk reguleringskurve. Inkorporer en digital skærm til at visualisere justeringsparametrene. Tilbyder en blød dæmpning fra 0 til 100% uden flimmer og er kompatibel med monokolor RF 2.4G "Skydance" fjernbetjeninger. Afhængigt af den valgte frekvens vil den manuelle regulering tillade op til en maksimal strømafbrydelse på 20A. IND/UD: 12/48V Max. 20A Enfarvet 1 kanal IP20



Product data

Certifikater	CE, ROHS
Mål (mm) LxLxh	107 X 75 X 38
Garanti	5 år
IP	IP20
Temperaturområde	-30°C ~ +55°C
Kontrolsystem	0-10V
Nominel spænding (V)	12-48VDC
Udendørs brug	Nej

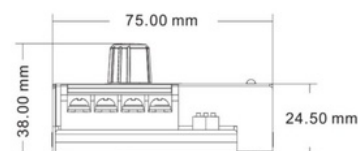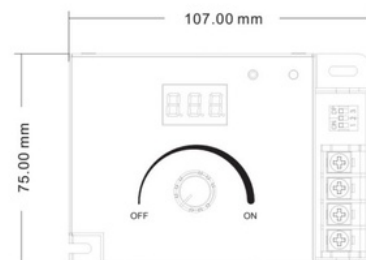

Product variants

Reference

Attributes



SK-V1-K