




Surface mounted LED Panel Ceiling 60x30cm 24W 2150 Lumens

60 x 30 cm 24W LED Ceiling Panel surface-mounted with a white frame. Includes a high-quality flicker-free driver. Aesthetically elegant and discreet, as well as being fully compact. Sturdy and lightweight, easy and quick to install, it is ideal for mounting on structural ceilings that do not allow for recessed installation. - Includes screws and anchors - 24W 230V 600x300x40mm IP20



Product data

Light temperature	3000°K (use), 4000°K (use), 6000K (use)
Opening angle (°)	160
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	595x300x40
LED Panel Dimensions	60x30
Driver	External
Efficiency (Lm/w)	77
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	2100
Material	Aluminum
Material diffuser	Polycarbonate
Assembly	Surface
Orientable	No
Power (W)	24
Sensor	No
Nominal Voltage (V)	230V

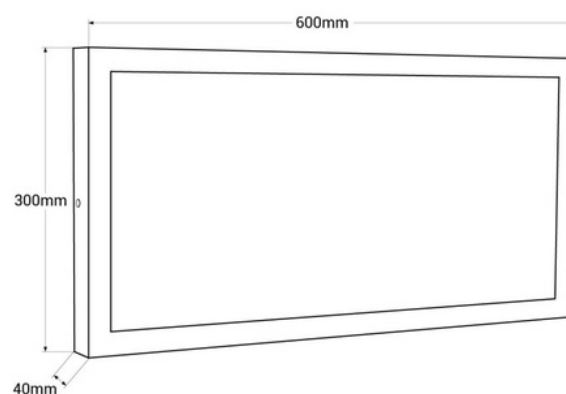

Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
Outdoor Use	No
Recommended Use	Kitchens
Service life (h)	25,000

Product variants

Reference

Attributes

B4228-BC

Light temperature : 3000°K (use)



B4228-BF

Light temperature : 6000K (use)



B4228-BN

Light temperature : 4000°K (use)

