





RoHS SELV CE Class 2

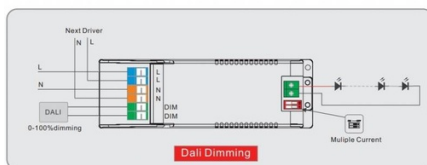


DALI PUSH 9-42V 14W multicurrent dimmable driver (200-350mA)

Ref. PE10DA42


Adjustable DALI and PUSH multi-current driver 14W. Regulation with DALI protocol. Constant current output for LED luminaires of 9-42V and current between 200mA and 350mA. The driver incorporates an EMC filter, produces no flicker (NO FLICKER), and smoothly and consistently regulates lighting without jumps or noise. Settable multicurrent via DIP switch. 200mA, 250mA, 300mA, and 350mA.

Product data

Certs	CE, ROHS
Energy efficiency class	A+ (2021)
Connectivity	Wiring
Dimensions (mm) LxWxH	105x43.5x26.5
Power factor (cosφ)	0.95
Frequency (Hz)	50
Frequency of Use	Intensive
Guarantee	According to legal warranty: 3 years
IP	IP20
Maximum power (W)	14
Temperature range	-20 ~ +65°F
Sensor	No
Control system	DALI, PUSH
Output Voltage (V)	9-42V-DC
Nominal Voltage (V)	200-240V-AC
Outdoor Use	No
Service life (h)	25,000



Product variants

Reference	Attributes
PE10DA42	<div><div>RoHS SELV CE Class 2</div></div>