

100lm/W

Alta eficiencia
High efficiency
Haute efficacité



4W




Recessed circular LED downlight - 4W - Cutout Ø77mm

4W recessed circular LED downlight, with an outer diameter of 98mm. Made of white polycarbonate, it offers efficient lighting without electromagnetic noise, making it ideal for indoor spaces. Cut diameter: Ø77mm.

Product data

Light temperature	3000°K (use), 4000°K (use), 6000K (use)
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	98x98x25.5
Cutting dimensions (mm)	Ø77-82
Dimmable	No
Efficiency (Lm/w)	100
Form	Circular
Frequency of Use	normal
Guarantee	According to legal warranty: 3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Material diffuser	Polycarbonate
Assembly	Recessed
Orientable	No
Temperature range	-20°F ~ +40°F
Nominal Voltage (V)	230
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
Outdoor Use	No
Service life (h)	25,000

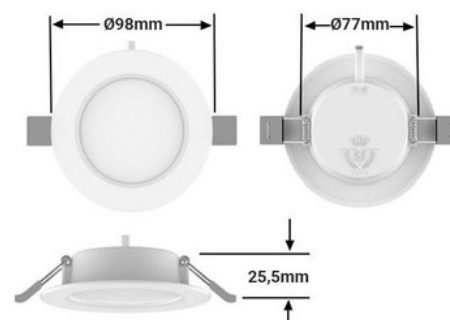

Product variants

Reference	Attributes	
B1240-B-4W-BC	Light temperature : 3000°K (use)	<div> <div> 100lm/W Alta eficiencia High efficiency Haute efficacité </div> <div>  </div> </div> <div> 4W  </div>
B1240-B-4W-BF	Light temperature : 6000K (use)	<div> <div> 100lm/W Alta eficiencia High efficiency Haute efficacité </div> <div>  </div> </div> <div> 4W  </div>
B1240-B-4W-BN	Light temperature : 4000°K (use)	<div> <div> 100lm/W Alta eficiencia High efficiency Haute efficacité </div> <div>  </div> </div> <div> 4W  </div>