

100lm/W
Alta eficiencia
High efficiency
Haute efficacité



20W




Recessed circular LED downlight - 20W - Cutout Ø190mm

20W recessed circular LED downlight, with an outer diameter of 217mm and a depth of 25.7mm. Made of white polycarbonate, it provides efficient lighting with no electromagnetic noise, ideal for indoor spaces. Cutting diameter: Ø190mm.

Product data

Light temperature	3000°K (use), 4000°K (use), 6000K (use)
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	Ø217 x 25.7 mm
Cutting dimensions (mm)	Ø185-190mm
Dimmable	No
Efficiency (Lm/w)	100
Form	Circular
Frequency of Use	normal
Guarantee	According to legal warranty: 3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	2000
Material	Polycarbonate
Material diffuser	Polycarbonate
Assembly	Recessed
Orientable	No
Temperature range	-20°F ~ +40°F
Nominal Voltage (V)	230
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white

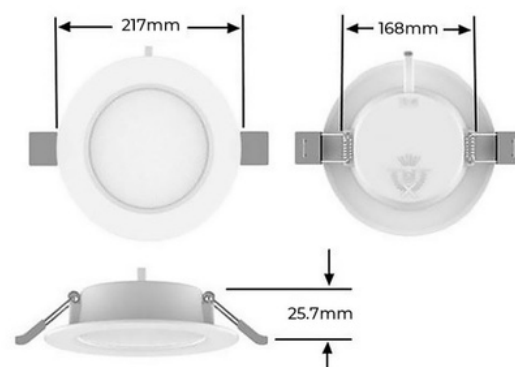

Outdoor Use	No
Recommended Use	Kitchens
Service life (h)	25,000

Product variants

Reference	Attributes	
B1242-B-20W-BC	Light temperature : 3000°K (use)	100lm/W Alta eficiencia High efficiency Haute efficacité  20W 
B1242-B-20W-BF	Light temperature : 6000K (use)	100lm/W Alta eficiencia High efficiency Haute efficacité  20W 
B1242-B-20W-BN	Light temperature : 4000°K (use)	100lm/W Alta eficiencia High efficiency Haute efficacité  20W 