



Superficie



Empotrar

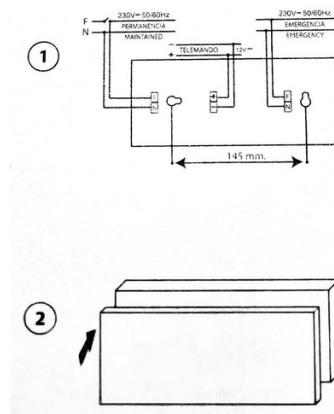

Emergency light LED REX MINI 60LM AUTOTEST IP65

Ref. 8551040601-T

Emergency lights with Autotest of 60LM with protection index IP65. Non-permanent, automatic activation in case of power supply interruption. Made of polycarbonate and compliant with standards: UNE-EN 60598-2-22, UNE-EN 605981-1, UNE-EN 62031, and UNE-EN 62384. The AUTOTEST system provides real-time information on the status of the luminaire, automatically performing all the tests indicated in the UNE-EN-50172 standard. This allows for easy inspection and maintenance of the emergency luminaire. Sealed battery with a 1-hour autonomy. The emergency light can be installed either recessed, with the accessory not included for recessing, or surface-mounted. Surface measurements: 255x89x37mm Built-in (with accessory): 278x115x36mm Cutting dimensions: 263x97mm




Product data

Certs	CE, ROHS
Dimensions (mm) LxWxH	255x68x37
Frequency (Hz)	50/60Hz
Guarantee	According to legal warranty: 3 years
IP	IP65
Kelvin (K)	6500
Material	Polycarbonate
Assembly	Recessed, Surface
Nominal Voltage (V)	230V-AC
Type of LED	SMD 5730
Outdoor Use	No
Service life (h)	25,000



Superficie

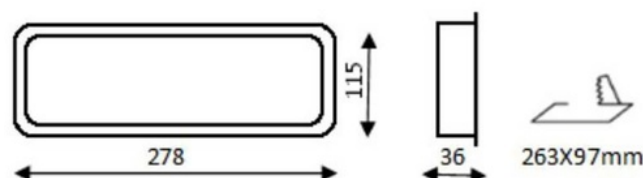

Empotrar

Product variants

Reference

Attributes



8551040601-T