


**24W**  
CRI >80  
LED  
120°  
100 lm/W  
CHIP  
SMD 2835




## Square LED Surface Mounted Ceiling Lamp 24W High Efficiency

Square surface-mounted LED panel with a power of 24W. Modern and minimalist design with dimensions of 289x289mm. Made of polycarbonate with a white trim. Homogeneous and intense light, thanks to the opal polycarbonate diffuser. The DOB offers a high-efficiency LED panel with a luminous efficacy of 80lm/W, low consumption, no noise, and no flicker. Light beam opening angle of 120 degrees. LED luminaires ideal for both professionals and individuals. Very uniform general lighting in any indoor space. Perfect option for homes, offices, restaurants, etc. ✓ 24W ✓ 230V ✓ 120° ✓ IP20

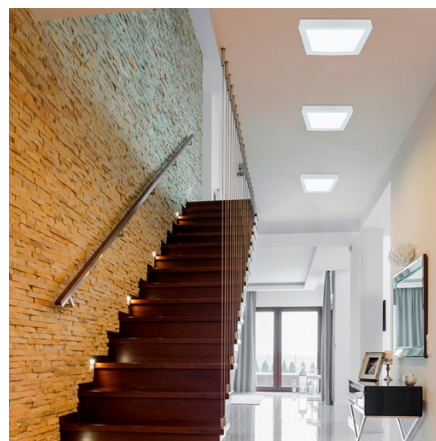

### Product data

Light temperature	3000°K (use), 4000°K (use), 6000K (use)
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	289xx289x35mm
Dimmable	No
Efficiency (Lm/w)	80
Form	Cuadrado
Frequency (Hz)	50 - 60
Frequency of Use	normal
Guarantee	3 years
IP	IP20
Kelvin (K)	4000, 6000
Lumens (Lm)	1900
Material	Polycarbonate
Assembly	Surface
Orientable	No
Power (W)	24
Temperature range	-20°F ~ +40°F
Nominal Voltage (V)	230
Type of LED	SMD 2835
Key	Cold white, Neutral white

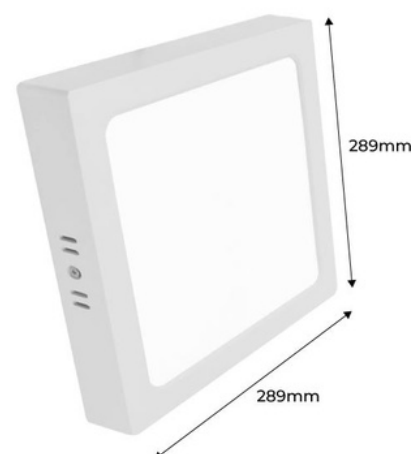

Outdoor Use	No
Service life (h)	25,000

Product variants

Reference	Attributes	
B1030-B-24W-BC	Light temperature : 3000°K (use)	
B1030-B-24W-BF	Light temperature : 6000K (use)	
B1030-B-24W-BN	Light temperature : 4000°K (use)	