




72W
UGR<19
90 lm/W

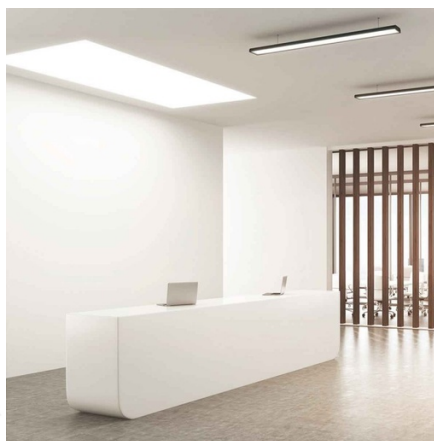

Pack of 12 slim LED panels 120X60cm - PHILIPS Driver - 72W - UGR19

PACK of 12 recessed LED panels 120x60cm - PHILIPS driver. The panels feature a sleek design, ultra-thin profile, and cutting-edge technology that allows them to provide powerful, uniform lighting in 3 shades: warm white (3000K), neutral white (4000K), and cool white (6000K). They are high-efficiency fixtures with a power of 72W and a luminous flux of 5900 lumens. They incorporate a micro-prismatic diffuser that ensures glare-free illumination ($UGR \leq 19$), ideal for offices, conference rooms, schools, or hospitals. Thanks to their high color rendering index ($CRI > 80$), they reproduce colors very similarly to natural light. The panels can be mounted on false ceilings or embedded directly into drywall using a recessed frame (not included).



72W
UGR<19
90 lm/W


Product data

Light temperature	Cold White (DO NOT USE) , Warm White , Neutral White
Opening angle (°)	160
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	1195 x 595 x 7
LED Panel Dimensions	120x60
Driver	Philips
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	According to legal warranty: 3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	5900
Assembly	Recessed
Orientable	No
Power (W)	72
Temperature range	-18°F ~ +55°F
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 4014
Key	Warm white, Cold white, Neutral white



UGR	UGR19
Outdoor Use	No
Recommended Use	Hotels, Offices, Commerce, Parking
Service life (h)	25,000

Product variants

Reference	Attributes	
K5234-BF-12	Light temperature : Cold White (DO NOT USE)	
K5234-BN-12	Light temperature : Neutral White	