





Pack of 5 outdoor LED floodlights 50W - 95lm/W - IP65

PACK X 5 50W LED projectors with a compact design, featuring a metal housing and glass diffuser. They are adjustable and have an efficiency of 95lm/W. Suitable for outdoor use thanks to its IP65 protection rating. Available in 3 shades: warm white (3000K), neutral white (4000K), and cool white (6000K).

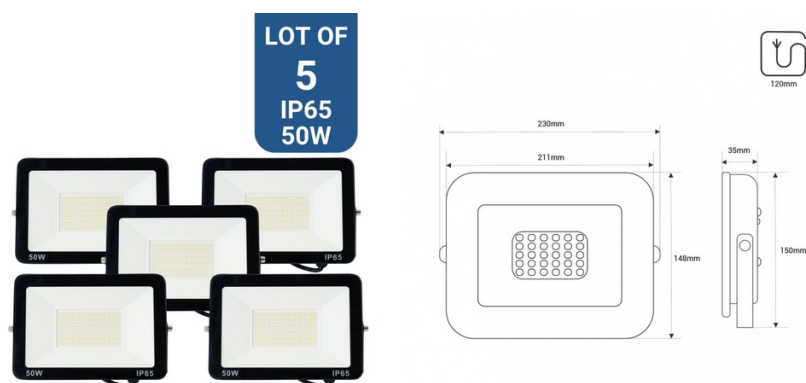



Product data

Light temperature	3000°K (use), 4000°K (use), 6000K (use)
High	35mm
Width	148mm
Opening angle (°)	120
Certs	CE, ROHS
Energy efficiency class	F
CRI	80-85
Dimmable	No
Driver	Internal
Efficiency (Lm/w)	86
Frequency (Hz)	50 - 60
Frequency of Use	normal
Projector Range	Slim Series, Packs
Guarantee	3 years
IP	IP65
Kelvin (K)	3000, 6000
Long	230 mm
Lumens (Lm)	4569, 4584
Material	Aluminum
Material diffuser	Crystal
Assembly	Surface
Orientable	Yes

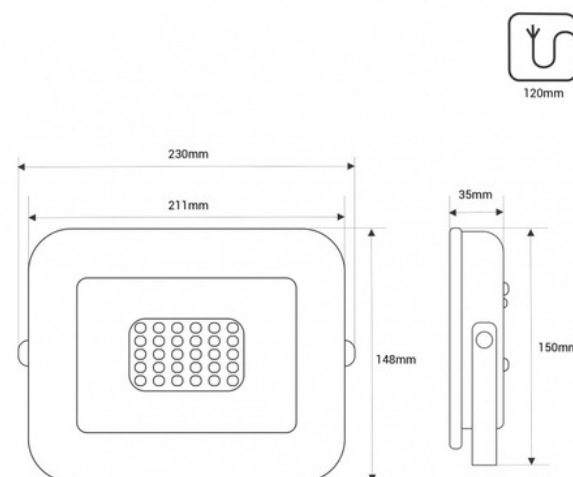

Power (W)	50
Temperature range	-18°F ~ +55°F
Sensor	No
Nominal Voltage (V)	230
Type of LED	SMD 2835
Key	Warm white, Cold white
UGR	No
Outdoor Use	If
Service life (h)	25,000

Product variants

Reference	Attributes	
K1883-5-BC	Light temperature : 3000°K (use)	
K1883-5-BF	Light temperature : 6000K (use)	
K1883-5-BN	Light temperature : 4000°K (use)	