



Recessed LED downlight - 8W - Adjustable cutout diameter: Ø 50-90mm

Adjustable diameter LED downlight with a modern and innovative design. It features 8W of power and an opal diffuser that ensures uniform lighting without glare. This downlight stands out for its sliding mounting springs, which allow it to adjust to holes with a variable diameter between 50 and 90mm. It is available in warm white (3000K), neutral white (4000K), and cool white (6000K). Its installation is very simple and is suitable for both home and commercial use. **Mounting and connection accessories included**

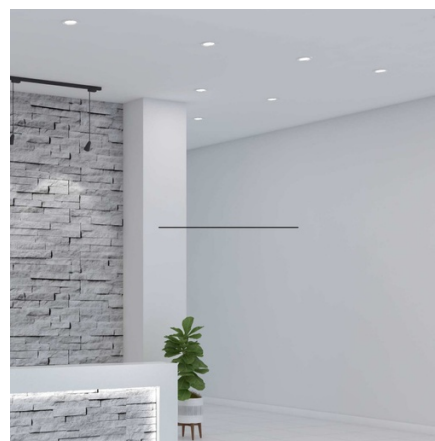

Product data

Light temperature	3000°K (use), 4000°K (use), 6000K (use)
Opening angle (°)	120
Certs	CE, ROHS
Dimensions (mm) LxWxH	Ø 118 x 20
Cutting dimensions (mm)	Ø 50 to 90
Dimmable	No
Form	Circular, Ultrafine
Frequency (Hz)	50 - 60
Guarantee	According to legal warranty: 3 years
IP	IP20
Material	Metal, Polycarbonate
Power (W)	8
Nominal Voltage (V)	220 - 240 V AC
Outdoor Use	No
Service life (h)	25,000

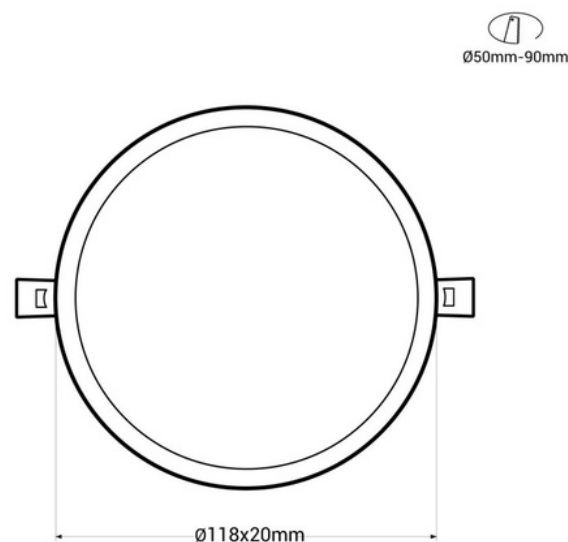

Product variants

Reference

Attributes

B1276-BC

Light temperature : 3000°K (use)



B1276-BF

Light temperature : 6000K (use)



B1276-BN

Light temperature : 4000°K (use)

