

42W COB LED Downlight - CRI90 - Bridgelux chip - Lifud driver - IP20 - Cutout Ø 215mm


Ref. B1268-CCT

Recessed and adjustable LED downlight, with cutting-edge technology for the most demanding projects. It features Bridgelux COB LED chips and Lifud driver that guarantee the highest quality lighting and "No flicker". Thanks to its high color rendering index (CRI>90), it reproduces colors very similarly to natural light. Its CCT system allows you to choose between warm white, neutral, or cool tones. **Mounting and connection accessories included**



Product data

Light temperature	CCT (to use)
Opening angle (°)	48
Certs	CE, ROHS
Energy efficiency class	F
CRI	90-95
Dimensions (mm) LxWxH	Ø 250 x 144
Cutting dimensions (mm)	Ø 215
Dimmable	No
Driver	Lifud
Form	Circular
Guarantee	According to legal warranty: 3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Material	Polycarbonate
Material diffuser	Polycarbonate
Assembly	Recessed
Orientable	Yes
Power (W)	42
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	COB
Key	CCT

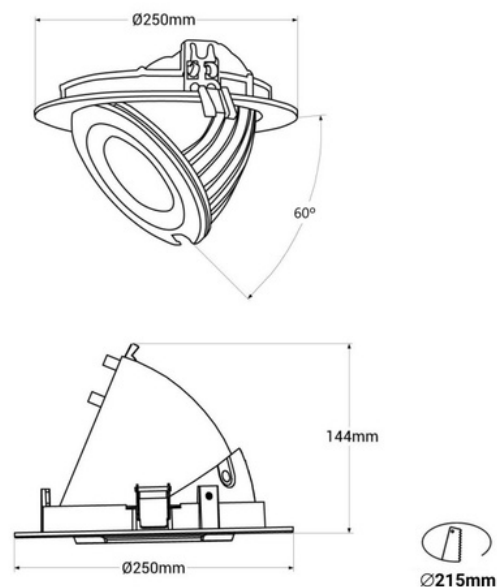

Recommended Use	Bedrooms, Hotels, Commerce, Living room
-----------------	---

Product variants

Reference

Attributes

B1268-CCT

Light temperature : CCT (to use)

