



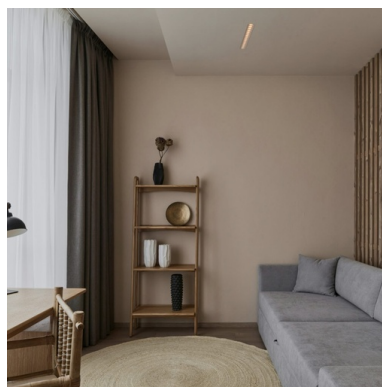


Recessed/trimless linear LED spotlight for plasterboard - 30W - UGR18 - CRI90 - White

Recessed LED spotlight, integrable in drywall, with a power of 30W. Provides an aesthetic finish, with no noticeable edges or flanges. Incorporates Osram LED chips and KeGu driver. It stands out for its low glare index (UGR<18) and its high color rendering index (CRI>90). Available in black and warm white shades (2700K) and neutral white (4000K). ** 5-Year Warranty **

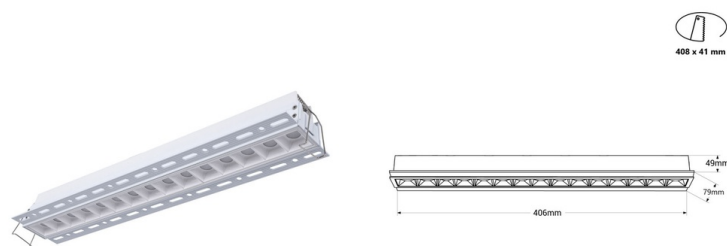

Product data

Case color	White (use), Black (use)
Light temperature	2700°K (use), 4000°K (use)
Opening angle (°)	45
Certs	CE, ROHS
Energy efficiency class	F
CRI	90-95
Dimensions (mm) LxWxH	406 x 79 x 49
Cutting dimensions (mm)	408 times 41
Dimmable	No
Driver	External, KeGu
Form	Linear
Guarantee	5 years
IP	IP20
Kelvin (K)	4000, 2700
Lumens (Lm)	warm white: 2578lm - neutral white: 2734lm, warm white: 2578lm - neutral white: 2734lm
Material	Aluminum
Material diffuser	Polycarbonate
Assembly	Integration
Orientable	No
Power (W)	30
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	OSRAM Chip
Key	Neutral white, Extra warm white
UGR	UGR18
Recommended Use	Dining room, Bedrooms, Hotels, Kitchens, Commerce, Living room, Museums - Galleries, Fashion and retail
Service life (h)	25,000



Product variants

Reference	Attributes	
B1219-30W-B-270	Case color : White (use), Light temperature : 2700°K (use)	
B1219-30W-B-BN	Case color : White (use), Light temperature : 4000°K (use)	
B1219-30W-N-270	Case color : Black (use), Light temperature : 2700°K (use)	
B1219-30W-N-BN	Case color : Black (use), Light temperature : 4000°K (use)	