




Single colour controller 12-48V DC - 15A - RF 2.4G - PUSH dimmer - Skydance



Ref. SK-V1-L/P

Monocolor controller for LED luminaires of 12-48V, high quality and durability. Allows the variation of PWM frequency between: 500Hz, 2kHz, 8kHz, or 16kHz and selection of linear or logarithmic regulation curve. Offers a smooth dimming from 0 to 100% without flickering and is compatible with 2.4G RF Skydance remote controls. It is adjustable by PUSH. It features "auto-transmission" and "auto-synchronization" functions, allowing signals to be sent to other controllers and synchronizing them when controlled by the same remote control.

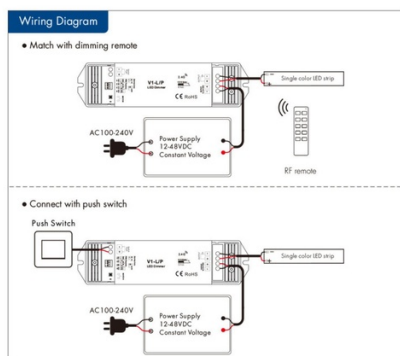

Product data

Certs	CE, ROHS
Connectivity	RF
Dimensions (mm) LxWxH	175 X 45 X 27
Control distance	30 minutes
Guarantee	5 years
Maximum intensity (A)	15A (12-24V) / 10A (36-48V)
IP	IP20
Power (W)	12V:180W / 24V:360W / 36V:360W / 48V:480W
Temperature range	-30°F ~ +55°F
Control system	PUSH
Output Voltage (V)	12 - 24
Nominal Voltage (V)	12-48V
Outdoor Use	No

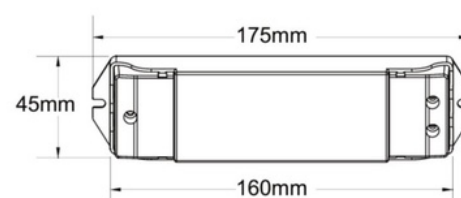

Product variants

Reference

Attributes

SK-V1-L/P

