



RGBW/RGB/CCT/Single colour Controller 12-48V DC - 20A (5A/channel) - RF 2.4G - PUSH Dimmer - Skydance


Ref. SK-V4

RGBW / RGB / CCT / Monocolor 4-channel controller for LED fixtures of 12-48V. In RGBW and RGB mode, it features 10 preset dynamic modes. Offers a smooth dimming from 0 to 100% without flickering and is compatible with RF 2.4G remote controls. It is adjustable by PUSH. It has "auto-transmission" and "auto-synchronization" functions, allowing signals to be sent to other controllers and synchronizing them when controlled by the same remote control.

Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard	EN 62368-1:2020+A11:2020
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE,EMC,RED

Product data

Certs	CE, ROHS
Connectivity	RF
Dimensions (mm) LxWxH	175 x 45 x 27
Control distance	30 minutes
Guarantee	5 years, According to legal warranty: 3 years
Maximum intensity (A)	5A/canal
IP	IP20
Number of channels	4
Power (W)	4 x (60-240)W
Nominal Voltage (V)	12-48VDC
Outdoor Use	No

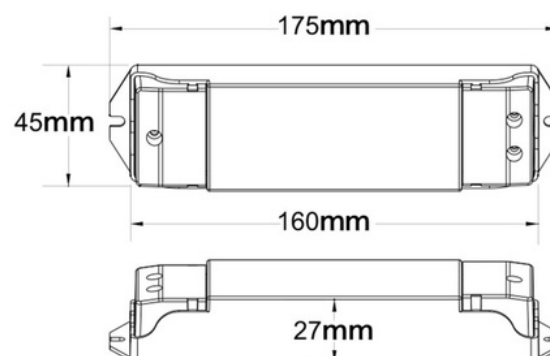

Product variants

Reference

Attributes



SK-V4