




Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard	EN 62368-1:2020+A11:2020
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE,EMC,RED



RGB+CCT Controller 12-48V DC - 25A (5A/channel) - RF 2.4G - PUSH dimmer - Skydance

Ref. SK-V5


RGB + CCT Controller with 3 channels for LED luminaires of 12-48V. It features 10 preset dynamic modes. Offers a smooth dimming from 0 to 100% without flicker and is compatible with 2.4G RF Skydance remote controls. It is adjustable by PUSH. It has a "auto-transmission" and "auto-synchronization" function, allowing signals to be sent to other controllers and synchronizing them when controlled by the same remote.

Mechanical Structures and Installations



Product data

Certs	CE, ROHS
Connectivity	RF
Color control	RGB+CCT
Dimensions (mm) LxWxH	175 X 45 X 27
Control distance	30 minutes
Guarantee	5 years
Maximum intensity (A)	5A/CH: 12-24V 4A/CH: 36-48V
IP	IP20
Number of channels	5
Power (W)	5 x 60: 12V 5 x 120: 24V 5 x 144: 36V 5 x 192: 48V
Nominal Voltage (V)	12-48VDC
Outdoor Use	No

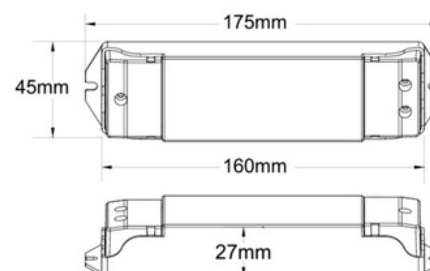

Product variants

Reference

Attributes



SK-V5