



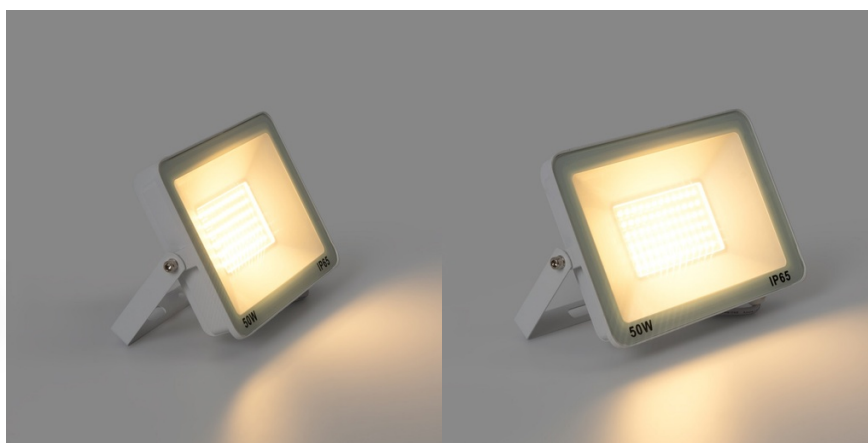


Outdoor LED Floodlight - 50W - 95lm/W - IP65 - White

50W LED Projector with a compact design, featuring a white metal housing and glass diffuser. It is orientable and has an efficiency of 95lm/W. Suitable for outdoor use thanks to its IP65 protection rating. Available in 3 shades: warm white (3000K), neutral white (4000K), and cool white (6000K).

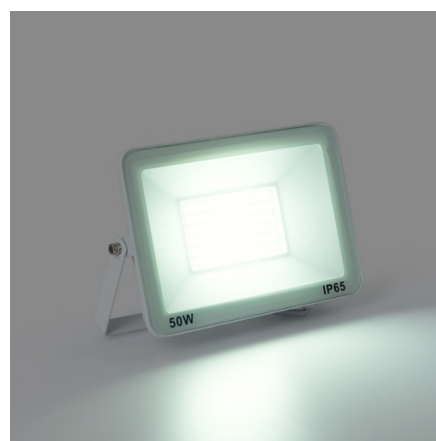

Product data

Light temperature	3000°K (use), 4000°K (use), 6000K (use)
Opening angle (°)	120
Energy efficiency class	F
CRI	80-85
Dimensions (mm) LxWxH	211 x 148 x 35
Dimmable	No
Efficiency (Lm/w)	95
Projector Range	Slim Series
IP	IP65
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	3695 (WW) / 4495 (NW) / 4371 (CW)
Assembly	Surface
Orientable	Yes
Power (W)	50
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Outdoor Use	If
Recommended Use	Garden, Parking, Fascias, Industrial Warehouses
Service life (h)	25,000

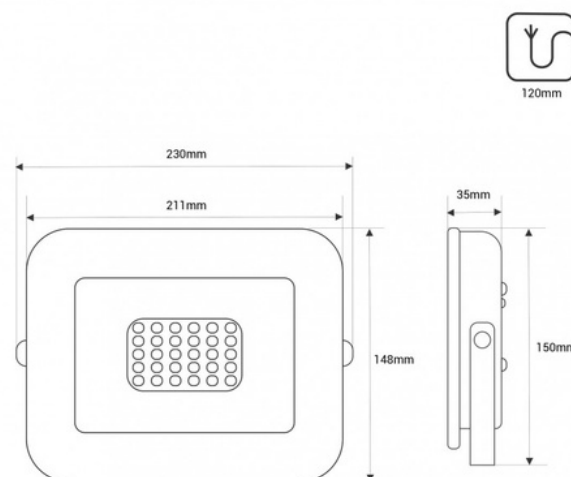

Product variants

Reference	Attributes	
B1883-B-BC	Light temperature : 3000°K (use)	
B1883-B-BF	Light temperature : 6000K (use)	