





Ref. SK-V4-X

One controller can be controlled
by up to 10 remotes

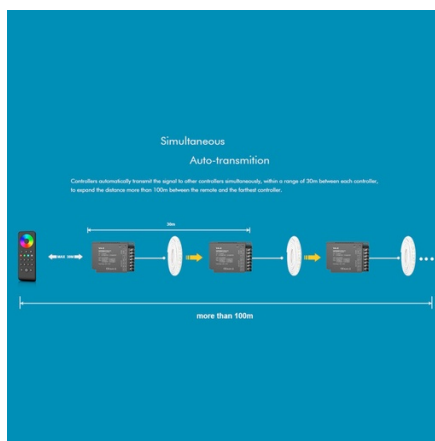

The diagram illustrates a central black rectangular controller with a grid of pins on its right side. It is surrounded by ten white remote controls, each featuring a colorful circular display and several buttons. Blue curved lines with small circles at the ends represent wireless signals connecting the central controller to each of the ten remotes, arranged in a circular pattern around it.

High	24.5mm
Width	85mm
Certs	CE, ROHS
Connectivity	RF
Color control	RGB, RGBW, CCT
Control distance	15m
Guarantee	5 years
Maximum intensity (A)	4x8A@12/24V - 4x5A@36/48V
IP	IP20
Long	117 mm
Power (W)	4x96W@12V / 4x192W@24V 4x180W@36V / 4x240W@48V
Temperature range	-30°F ~ +55°F
Output Voltage (V)	12-48VDC
Nominal Voltage (V)	12-48VDC

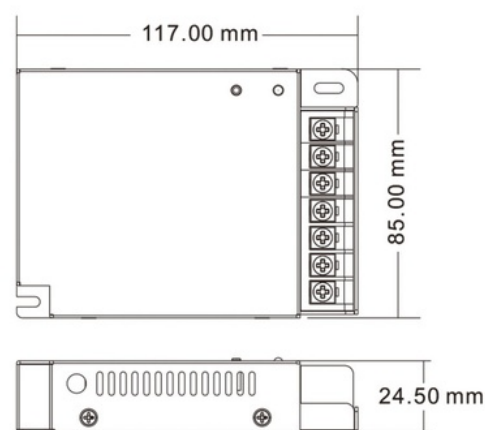

Product variants

Reference

Attributes



SK-V4-X