



Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard	EN 61348-1:2015+A1:2021 EN 61348-2-13:2014+A1:2017
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE, EMC, RED



CCT Controller - 12-24V DC - 2 channels - 5A/channel - RF 2.4GHz - Skydance


Ref. SK-V2

2-channel CCT controller for 12-24V LED luminaires. Offers a smooth dimming from 0 to 100% without flickering and is compatible with CCT RF 2.4GHz Skydance remote controls. With auto-transmission and auto-synchronization functions that allow for efficient and synchronized control.



Product data

High	18mm
Width	33mm
Connectivity	RF
Color control	Monochrome
Control distance	30 minutes
Guarantee	5 years
Maximum intensity (A)	5A/canal
IP	IP20
Long	97mm
Number of channels	2
Power (W)	2 x (60-120W)
Temperature range	-30°F ~ +55°F
Output Voltage (V)	12-24VDC
Nominal Voltage (V)	12-24V DC
Outdoor Use	No

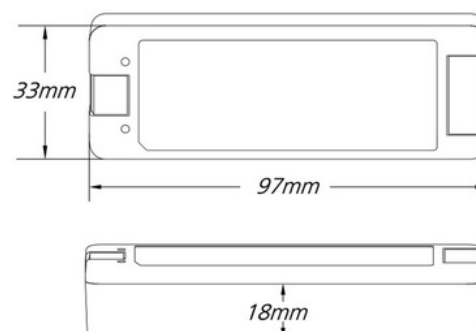

Product variants

Reference

Attributes

SK-V2

