





## Pack x 2 - Outdoor LED floodlights - 30W - 95lm/W - IP65

PACK X 2 LED projectors 30W in a compact design, with a metal housing and glass diffuser. They are adjustable and have an efficiency of 95lm/W. Suitable for outdoor use thanks to its IP65 protection rating. Available in 3 shades: warm white (3000K), neutral white (4000K), and cool white (6000K).

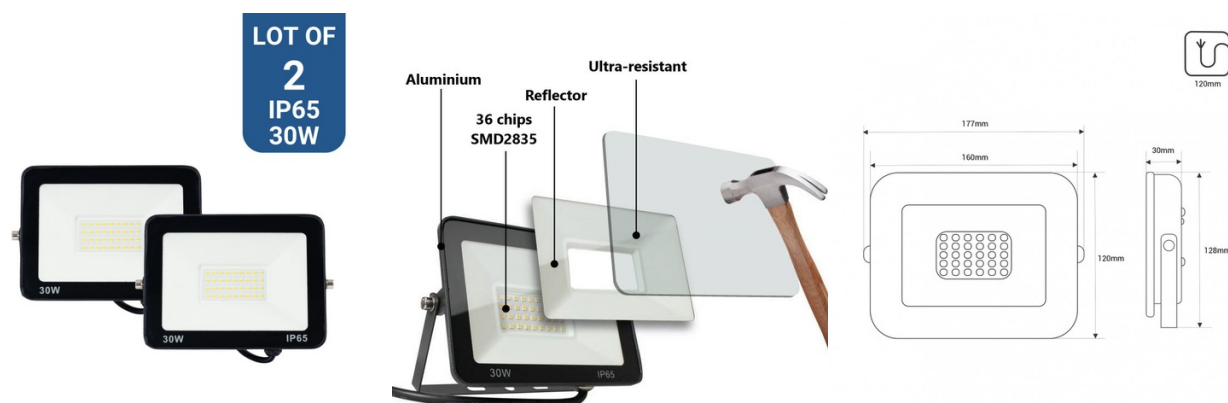

### Product data

|                         |                                         |
|-------------------------|-----------------------------------------|
| Light temperature       | 3000°K (use), 4000°K (use), 6000K (use) |
| Opening angle (°)       | 120                                     |
| Certs                   | CE, ROHS                                |
| Energy efficiency class | F                                       |
| CRI                     | 80-85                                   |
| Dimensions (mm) LxWxH   | 120 x 160 x 30                          |
| Dimmable                | No                                      |
| Driver                  | Internal                                |
| Efficiency (Lm/w)       | 95                                      |
| Power factor (cosφ)     | 0.6                                     |
| Frequency (Hz)          | 50 - 60                                 |
| Frequency of Use        | normal                                  |
| Projector Range         | Slim Series, Packs                      |
| Guarantee               | According to legal warranty: 3 years    |
| IP                      | IP65                                    |
| Kelvin (K)              | 3000, 4000, 6000                        |
| Lumens (Lm)             | 2167 (WW) / 2330 (NW) / 2310 (CW)       |
| Material                | Aluminum                                |
| Material diffuser       | Crystal                                 |
| Assembly                | Surface                                 |
| Orientable              | Yes                                     |
| Power (W)               | 30                                      |

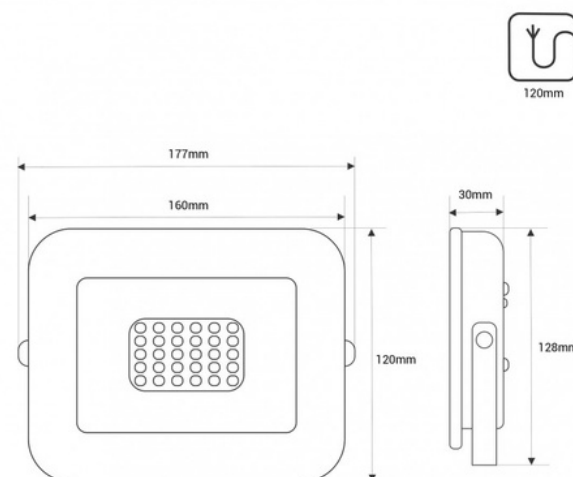

|                     |                                       |
|---------------------|---------------------------------------|
| Temperature range   | -20°F to +50°F                        |
| Sensor              | No                                    |
| Nominal Voltage (V) | 220 - 240 V AC                        |
| Type of LED         | SMD 2835                              |
| Key                 | Warm white, Cold white, Neutral white |
| UGR                 | No                                    |
| Outdoor Use         | If                                    |
| Recommended Use     | Garden                                |
| Service life (h)    | 25,000                                |

Product variants

| Reference  | Attributes                       |                                                                                                                                                                                  |
|------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| K1882-2-BC | Light temperature : 3000°K (use) |  <div>           LOT OF<br/> <b>2</b><br/>           IP65<br/>           30W         </div>   |
| K1882-2-BF | Light temperature : 6000K (use)  |  <div>           LOT OF<br/> <b>2</b><br/>           IP65<br/>           30W         </div> |
| K1882-2-BN | Light temperature : 4000°K (use) |  <div>           LOT OF<br/> <b>2</b><br/>           IP65<br/>           30W         </div> |