


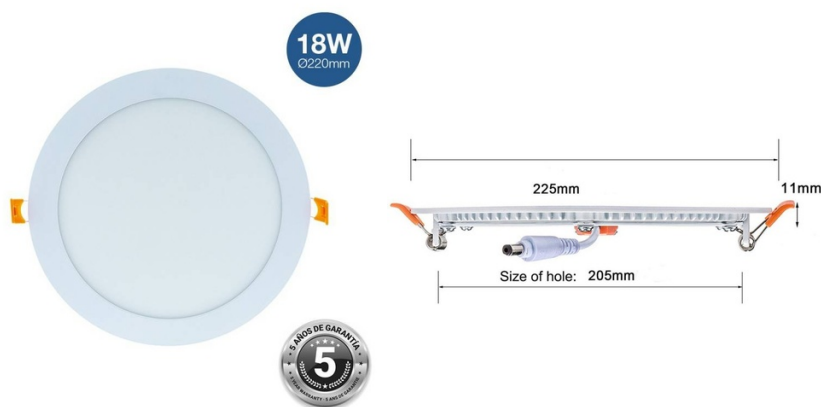


Recessed circular LED downlight - 18W - Cutout Ø205mm - 5 years warranty

18W circular recessed LED downlight, outer diameter Ø225mm and cutout Ø205mm, with white frame. Offers 1800 lumens, external driver without flicker, and an EMC filter to avoid interference. Ideal for illuminating rooms up to 8m². Available in warm white, neutral white, and cool white. ** 5 years of warranty **

Product data

Light temperature	3000°K (use), 4000°K (use), 6000K (use)
Opening angle (°)	160
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	Ø225x18
Cutting dimensions (mm)	Ø205
Dimmable	No
Efficiency (Lm/w)	99
Power factor (cosφ)	0.5
Form	Circular, Ultrafine
Frequency (Hz)	50 - 60
Frequency of Use	normal
Guarantee	5 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	1700, 1780
Material	Aluminum
Material diffuser	Polycarbonate
Assembly	Recessed
Orientable	No
Temperature range	-20°F ~ +40°F

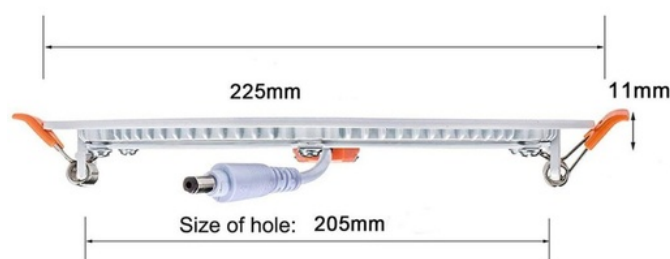

Sensor	No
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
Outdoor Use	No
Service life (h)	25,000

Product variants

Reference	Attributes	
B1072-BC	Light temperature : 3000°K (use)	
B1072-BF	Light temperature : 6000K (use)	
B1072-BN	Light temperature : 4000°K (use)	