



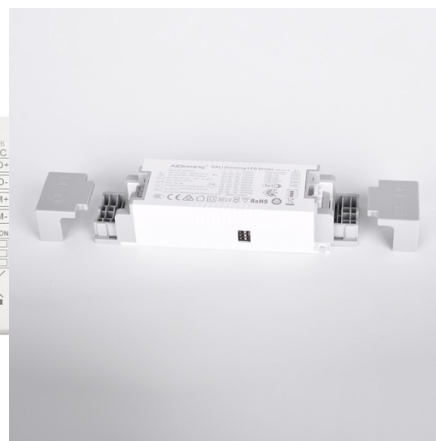

DALI PUSH dimmable driver 0-10V 9-42V 44W multicurrent (700-1050mA)

Ref. PE-N45DA42

Constant current DALI juht 9-42V 700-1050mA ✓ PRI: 100V-250V ✓ SEC: 9-42VDC ✓ 44.1W ✓ PF: 0.95 ✓ 50/60Hz ✓ 148x42x30mm

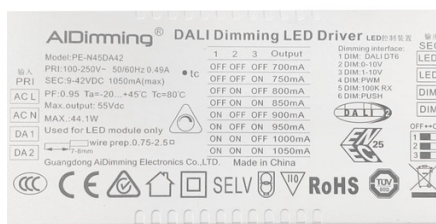

Product data

Certifikaadid	CE, ROHS
Väljundvool mA	1050mA
Dimensioonid (mm) Pxlxx	148x42x30mm
Dimmable translates to Estonian as hämarasummutus.	Jah
Jõudude tegur (cosφ)	0.9
Frekvents (Hz)	50 - 60
Materjal	Plastik
Maximaalne võimsus (W)	44.1
Temperatuuri vahemik	-20°C ~ +45°C
Kontrollsüsteem	DALI
Väljundpinge (V)	9 - 42
Nominiaalpinge (V)	100 - 250, 9-42VDC

Grosor: 30mm



Product variants

Reference

Attributes



PE-N45DA42