



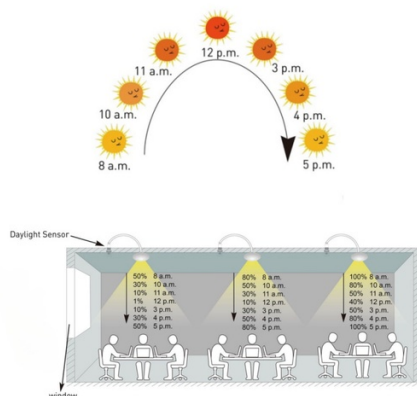

INSTALLATION

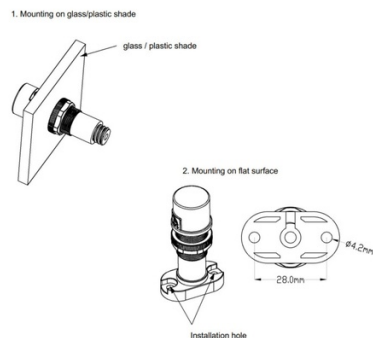


360° photoelectric twilight sensor - surface or recessed - Dimming 1-10V DC

Ref. SGL01


Fotoelektrični senzor 1-10V podesivi za sumrak, površinski ili za ugradnju, automatski prilagođava intenzitet rasvjetnih tijela prema ambijentalnoj svjetlosti, omogućujući učinkovito i kvalitetno osvjetljenje. Kompatibilan je s 1-10V upravljačima i regulabilnim svjetiljkama, s rasponom regulacije od 1% do 100%.

1.Daylight sensor SGL01 + 1-10v dimmable LED driver

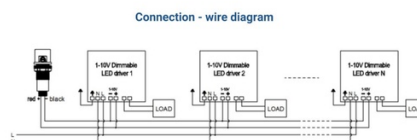

Product data

Kut detekcije (°)	360
Certifikati	CE, ROHS
Klasa izolacije	Klasa II
Dimenzije (mm) LxIxh	ø21,7 x 60,2
Smanjivo	Da
Frekvencija (Hz)	50 - 60
IP	IP20
Materijal	Polikarbonat
Montiranje	Ugradbeni, Površina
Raspon temperature	-20°C~+50°C
Sustav kontrole	1-10V DC
Nomin tension (V)	220 - 240 V AC
Tip senzora	Fotoeléctrico
Vanjska upotreba	Ne

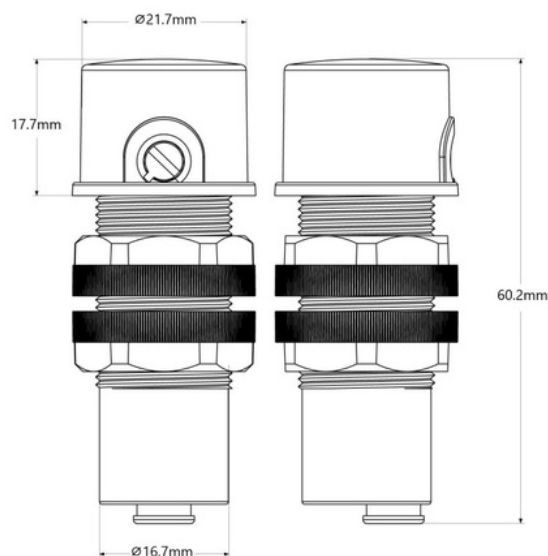

Product variants

Reference

Attributes



SGL01