


## DMX512 Decoder 12-24V DC - 5A/channel - 12 Channels - OLED Display

### Ref. SK-D12A

Decodificator DMX512 je uređaj za upravljanje LED osvjetljenjem s 12 izlaznih kanala, svaki s maksimalnom jačinom od 5A. Kompatibilan je s ulaznim naponom od 12-24V. Inkorporira OLED zaslon i tipke za odabir početne DMX adrese. Koristi DMX512 ulazni signal i daje PWM izlazni signal za postizanje glatke kontrole rasvjete.

### WIRING DIAGRAM




#### Note:

1. Connecting with green terminal (DMX AMP) or an extra amplifier will be needed when more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line.

### Product data

|                            |                  |
|----------------------------|------------------|
| Certifikati                | CE, ROHS         |
| Dimenzije (mm) LxIxh       | 246 x 116 x 38.5 |
| Jamstvo                    | 5 godina         |
| Maximalna intenzivnost (A) | 5A/kanal         |
| IP                         | IP20             |
| Broj kanala                | 12               |
| Napetost izlaza (V)        | 12 - 24          |
| Nomin tension (V)          | 12-24V DC        |
| Vanjska upotreba           | Ne               |

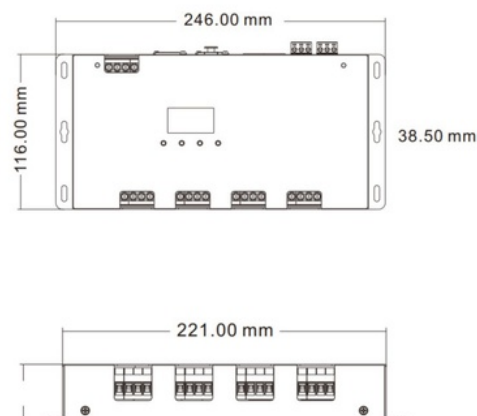

Product variants

| Reference | Attributes                                                                          |
|-----------|-------------------------------------------------------------------------------------|
| SK-D12A   |  |