



Mechanical Structures and Installations

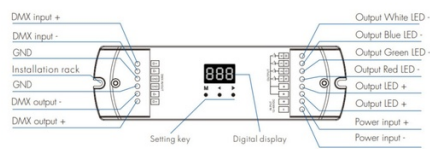

DMX512 Decoder 12-48V DC - 350-1200mA/channel - 4 Channels


Ref. SK-D4C-L

Decoder DMX512 je uređaj za kontrolu LED rasvjete s 4 izlazna kanala s rasponom intenziteta od 150-1200mA/kanal. Kompatibilan je s ulaznim naponom od 12-48V. Koristi DMX512 ulazni signal i pruža PWM izlazni signal za postizanje glatkog kontrole osvjetljenja. Podržava RDM daljinsko upravljanje, omogućava odabir izlazne razlučivosti i podešavanje PWM frekvencije.



Product data

Certifikati	CE, ROHS
Povezanost	DMX
Kontrola boje	RGB, RGBW
Dimenzije (mm) LxIxh	170 x 50 x 23
Jamstvo	5 godina
Maximalna intenzivnost (A)	0,35 - 1,2
IP	IP20
Broj kanala	4
Raspon temperature	-30°C ~ +55°C
Nomin tension (V)	12-48V
Vanjska upotreba	Ne

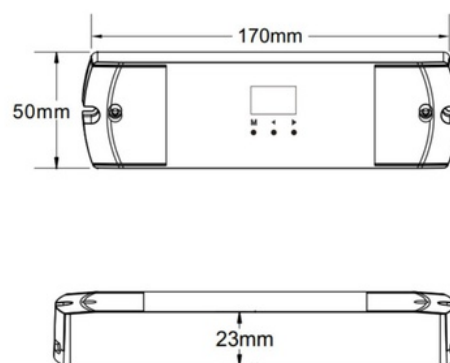

Product variants

Reference

Attributes



SK-D4C-L