
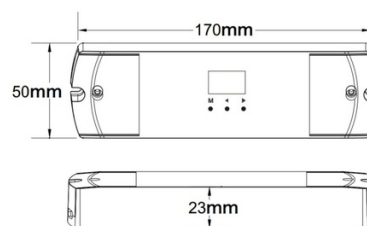


## Mechanical Structures and Installations

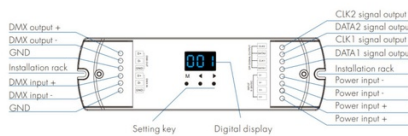


# DMX512 to SPI Pixel Decoder - 5-24V DC - RF Controller

Ref. SK-DS-L


LED DMX512 na SPI dekodir pretvara DMX signale u SPI signale za upravljanje pametnim ili digitalnim RGB ili RGBW LED trakama. Također radi kao RF kontroler, omogućujući povezivanje s RF daljinskim upravljačem 2.4GHz za praktičnu i bežičnu kontrolu. Posjeduje digitalnu ploču i kompatibilna je s brojnim tipovima LED IC čipova. Omogućuje stvaranje velike raznovrsnosti impresivnih i prilagodljivih efekata osvjetljenja za vaše projekte.

## Wiring Diagram

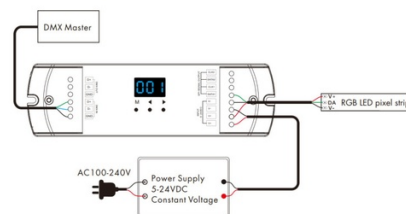

## Product data

|                    |                       |
|--------------------|-----------------------|
| Certifikati        | CE, ROHS              |
| Povezanost         | Radiofrekvencija, DMX |
| Kontrola boje      | RGB, RGBW             |
| Jamstvo            | 5 godina              |
| IP                 | IP20                  |
| Raspon temperature | -30°C ~ +55°C         |
| Nomin tension (V)  | 5-24V                 |
| Vanjska upotreba   | Ne                    |

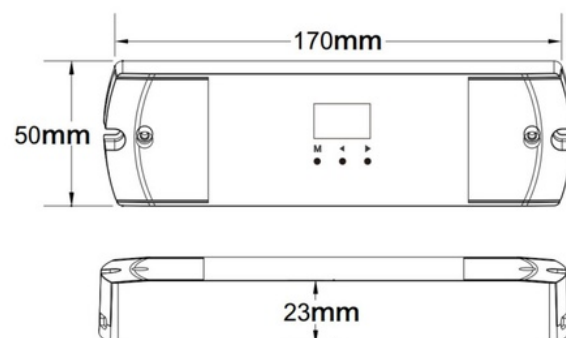

Product variants

Reference

Attributes



SK-DS-L