



Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard	EN 61348-1:2015+A1:2021 EN 61348-2-13:2014+A1:2017
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE, EMC, RED



CCT Controller - 12-24V DC - 2 channels - 5A/channel - RF 2.4GHz - Skydance


Ref. SK-V2

Kontroler CCT od 2 kanala za LED svjetiljke 12-24V. Pruža blago prigušenje od 0 do 100% bez treptanja i kompatibilan je s daljinskim upravljačima CCT RF 2,4GHz Skydance. Sa funkcijama auto-prijenosa i auto-sinkronizacije koje omogućuju učinkovitu i sinkroniziranu kontrolu.



Product data

Visoko	18mm
Ankora	33mm
Povezanost	RF
Kontrola boje	Monokromatski
Udaljenost kontrole	30m
Jamstvo	5 godina
Maximalna intenzivnost (A)	5A/kanal
IP	IP20
Dugo	97mm
Broj kanala	2
Snaga (W)	2 x (60-120W)
Raspon temperature	-30°C ~ +55°C
Napetost izlaza (V)	12-24VDC
Nomin tension (V)	12-24V DC
Vanjska upotreba	Ne

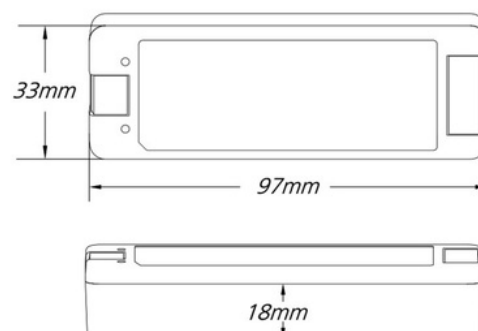

Product variants

Reference

Attributes

SK-V2

