



Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard	EN 61348-1:2015+A1:2021 EN 61348-2-13:2014+A1:2017
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE, EMC, RED



CCT Controller - 12-36V DC - 2 channels - 15A/channel - RF 2.4GHz - PUSH dimmer - Skydance


Ref. SK-V2-X

Kontroler CCT od 2 kanala za LED rasvjetu 12-36V. Nudi glatko prigušivanje od 0 do 100% bez treperenja i je kompatibilan s daljinskim upravljačima CCT ili monokromatskim RF 2.4GHz Skydance. Sa funkcijama auto-prijenosa i auto-sinkronizacije koje omogućuju učinkovitu i sinkroniziranu kontrolu. Može se regulirati pomoću PUSH-a.



Product data

Visoko	24,5 mm
Ankora	75mm
Certifikati	CE, ROHS
Povezanost	RF
Udaljenost kontrole	15m
Jamstvo	5 godina
Maximalna intenzivnost (A)	15A/CH
IP	IP20
Dugo	107mm
Broj kanala	2
Snaga (W)	2x(180-540)W
Raspon temperature	-30°C ~ +55°C
Nomin tension (V)	12-36V DC
Vanjska upotreba	Ne

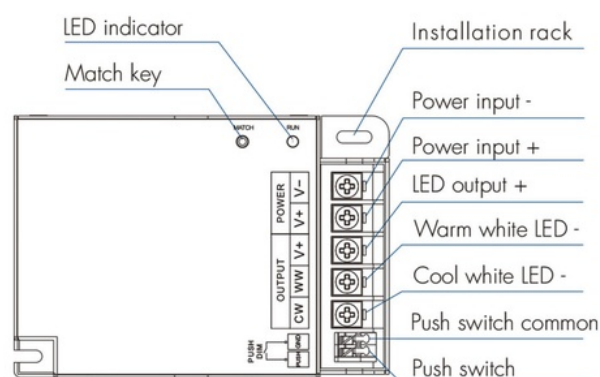

Product variants

Reference	Attributes
SK-V2-X	