

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

De SRP-1009-50CC ass e 50W dimmable LED Treiber mat enger konstant Stroumearausgang vu 1 Kanal a justéierbarem Stroum vun 250mA bis 1500mA iwwer DIP Schalter fir d'ënnerschiddlech konstant Stroumer. Et ass fir eng Input vun 200 - 240V entworf. De Stroumfaktor vum Treiber kann méi wéi 0.9 sinn, an d'Effizienz iwwerschreift 87%. Et erlaabt sanft a déif Dimmen vun 0.1% oni Flicker oder Summen. De LED Treiber ass mat engem RF Kontrollinterface entworf a kann mat enger Villfalt vu RF Fernsteuerungen kompatibel sinn. Dëse Treiber ass vun der Sunricher Mark am Perfect RF Kategorie.

Output	Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Output	Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Input	Rated Power	50W							
	Voltage Range	200-240V AC							
	Frequency	50/60Hz							
	Power Factor (Typ.)	>0.9							
	Efficiency (Typ.)	87% @ 230VAC							
	Input Current (Typ.)	0.27A @ 230VAC							
Protection	Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
	Short Circuit	Yes, auto recovery after fault removed							
	Over Voltage	Yes, auto recovery after fault removed							
	Over Temperature	Yes, auto recovery after fault removed							
Environment	Working Temp.	-20°C ~ +45°C							
	Max. Case Temp.	85°C							
	Working Humidity	10% ~ 95% RH non-condensing							
Storage Temp. & Humidity		-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Certificaten	CE, ROHS
Garantie	5 Joer

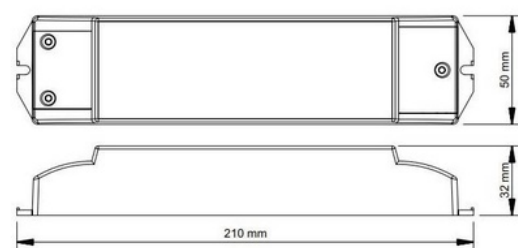

Product variants

Reference

Attributes



SRP-1009-50CC