





Funtion Introduction

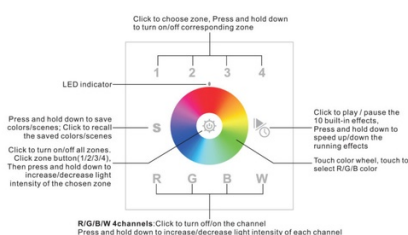


Installation

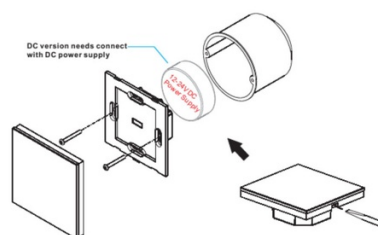

RGBW dimmable RF 12-24V-DC recessed touch mechanism for 4 zone LED lighting - SUNRICHER Perfect RF


Ref. SR-2820-DC

De BUILT-IN RGBW TOUCH MECHANISM ass eng Steierung déi e super-sensitiven Touchglas Panel huet. Et huet e Faarfrad dat drop gezechent ass, wat präzis, einfach a séier Upassung vu jidder Faarftéin erlaabt. Mir recommendéieren seng Benotzung mat den folgendem Empfänger: - Regular RGB Produkter 220V: RGB Empfänger 240V iwwer RF (Ref. D1009HT) [1] - Regulär Produkter 12-24V: RGBW Empfänger 12-36V RF (Ref. D1009FA) [2] [1] <https://www.barcelonaed.com/regulacion-rgb-led/1377-controlador-rgb-240v-3-canales-receptor-rf-dmx.html> [2] <https://www.barcelonaed.com/regulacion-rgb/1231-controlador-rgbw-pwm-12-36v.html>



Product data

Certificaten	CE, ROHS
Klasse énérgéiert Effizient	F
Verbindung	Radiofirfrequency
Faarfkontroll	RGBW
Dimensiounen (mm) LxIxh	86 x 86 x 30
Benotzungsfrequenz	Intensiv
Garantie	5 Joer
IP	IP20
Material	Plastik
Montage	Versenkbar
Detektéierberäich (m)	25.000
Temperaturbereich	0 ~ +40°C
Nummspannung (V)	12-24V DC
Uwendung am Freien	Nei
Letztenzäit (h)	35000

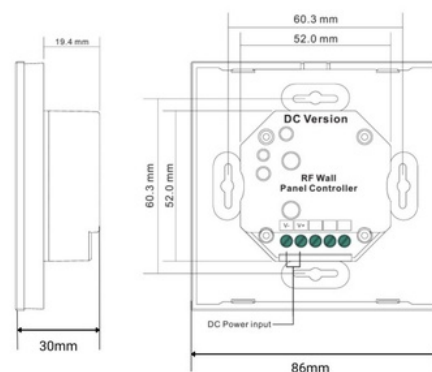

Product variants

Reference	Attributes
SR-2820-DC	