


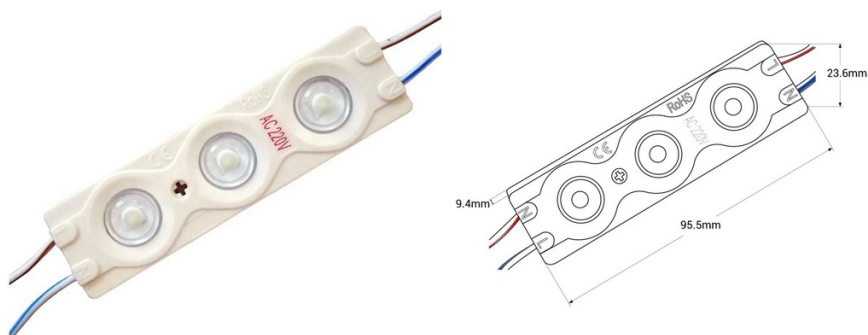


LED module for signage 2.5W direct to 230V IP65 120°.

Ref. BM1427BC

LED-Sträif fir direkt Beschrëftung bei 220V ouni Transformer. Chips: 3xSMD3030 Muecht: 2.5W Spannung: 230V-AC IP 65 Oppe Winke 120° Wäermt wäiss 3000K an cool wäiss 6500°K Präis pro Eenheet

Product data

Adhésioun	3M
Winkelope (°)	120
Certificaten	CE, ROHS
Klasse énérgéiert Effizient	A+ (2021)
CRI	80-85 in Luxembourgish is 80-85.
Dimensiounen (mm) LxHxW	95.5x23.6x9.4
dimmbars	Nei
Frequenz (Hz)	50 - 60
Benotzungsfrequenz	Intensiv
Garantie	Volgens gesetzlecher Garantie: 3 Joer
IP	IP65
Kelvin (K)	3000, 6500
Material	Plastik
Material Diffusor	Plastik
Leistung (W)	2.5
Temperaturbereich	-20°C ~ +40°C
Nummspannung (V)	220 - 240 V AC
Typ vum LED	SMD 3030
Tonalitéit	Fréisch Wäiss
Uwendung am Freien	Jo
Letztentzeit (h)	30.000

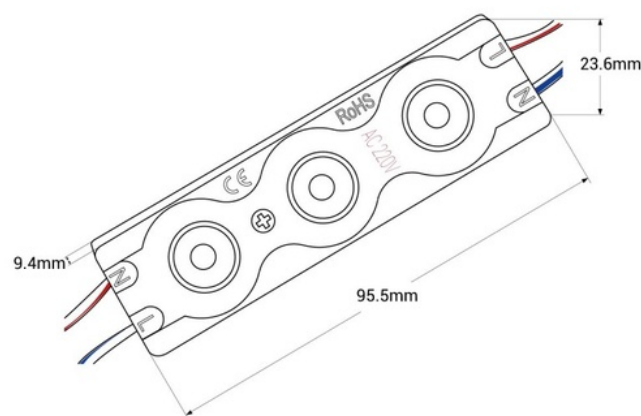

Product variants

Reference

Attributes

BM1427BC

